

PENSACOLA, FLORIDA

RNAV (GPS) RWY 25L


- (USN)

PENSACOLA NAS (FORREST SHERMAN FLD) (KNPA)

APCH CRS	Rwy Idg	8000
251°	TDZE	22
	Arpt Elev	28

RNP APCH-GPS	MISSED APPROACH: Climb to 800 then climbing left turn to 1500 direct FCTRY and hold.
RADAR required	

ATIS 124.35 266.8	APP CON 120.65 270.8	SHERMAN TOWER 120.7 340.2	SHERMAN GND CON 121.7 336.4	SHERMAN CLNC DEL 134.1 268.7	ASR/PAR
----------------------	-------------------------	------------------------------	--------------------------------	---------------------------------	---------

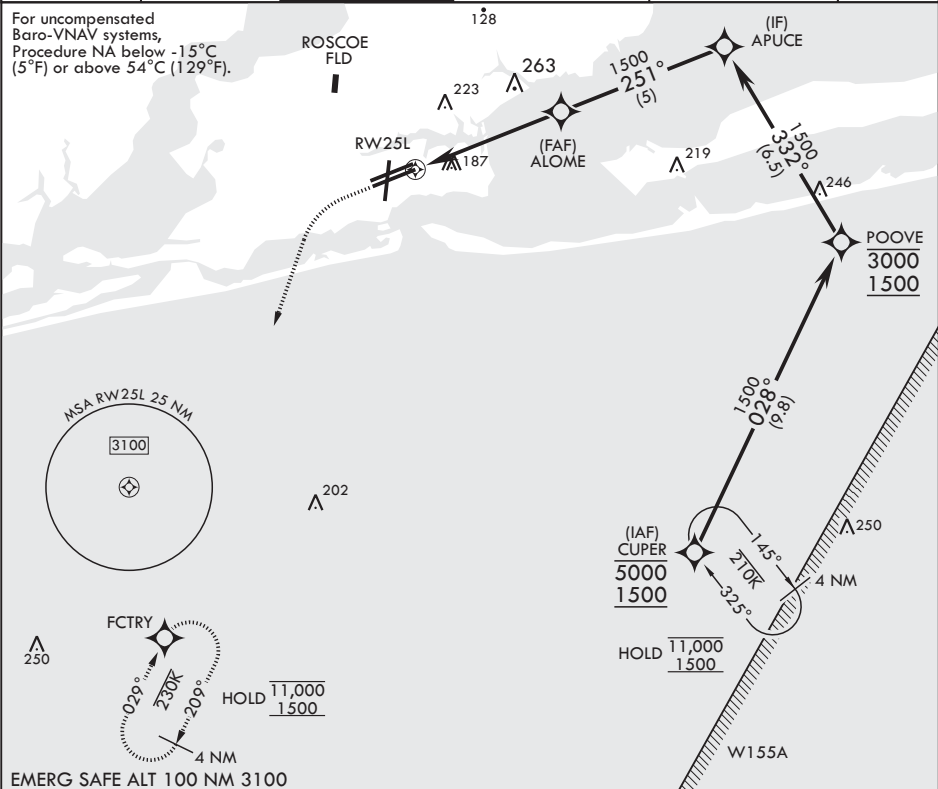

EMERG SAFE ALT 100 NM 3100

Diagram showing the 1.2 NM to RW25L and 4.5 NM distance markers. The diagram includes a heading scale from 800 to 1500, a compass rose, and a distance scale from 0 to 4.5 NM. The 1.2 NM distance is marked with a dashed line and a 1500 altitude. The 4.5 NM distance is marked with a solid line and a 1500 altitude. The diagram also shows the ALOME and APUCE points, a 251° heading, and a GP 3.00° TCH 52.

CATEGORY	A	B	C	D
RNAV/VNAV DA	460-1 1/4	438	(500-1 1/4)	
RNAV MDA	460-1	438 (500-1)	460-1 1/4	438 (500-1 1/4)
CIRCLING	520-1	492 (500-1)	540-1 1/2 512 (600-1 1/2)	600-2 572 (600-2)

Diagram showing the BCN TWR and runway layout with various navigational aids. The diagram includes a heading scale from 61 to 251, a compass rose, and a distance scale from 0 to 251. The diagram also shows the BCN TWR, runway layout, and various navigational aids including A1, A210, and A210.

HIRL all rwys
REIL all rwys

PENSACOLA, FLORIDA

30°21'N - 87°19'W PENSACOLA NAS (FORREST SHERMAN FLD) (KNPA)

Amtrd 4 12JUN25

RNAV (GPS) RWY 25L

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025