
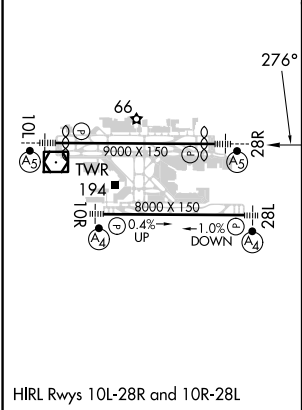
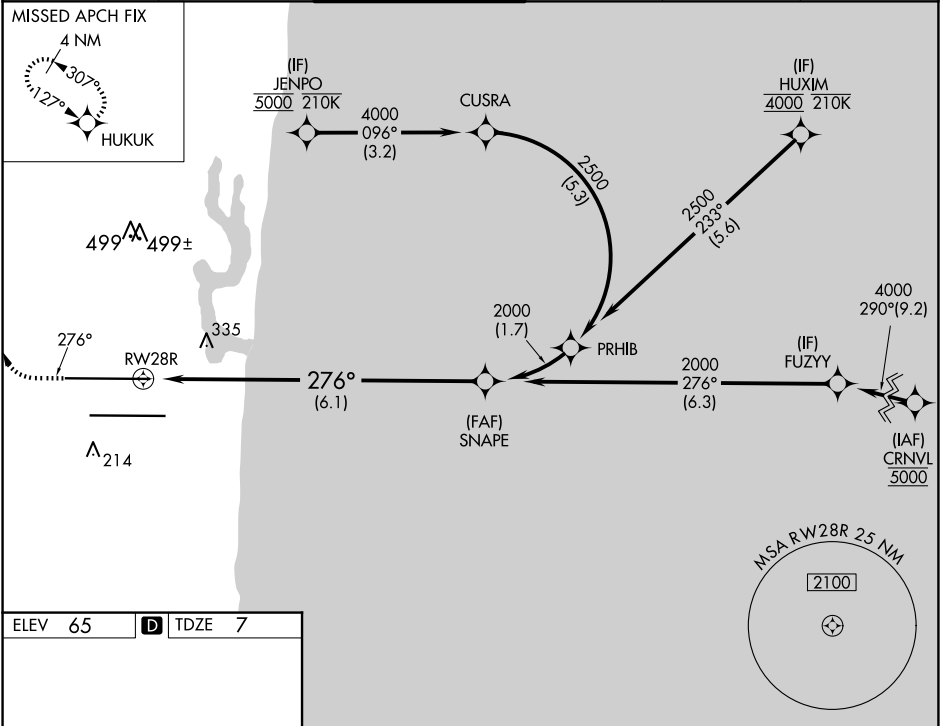


APP CRS	Rwy Idg	8394
276°	TDZE	7
	Apt Elev	65

RNAV (RNP) Z RWY 28R
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

RNP AR APCH - GPS. RADAR required. Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 7°C or above 54°C. For inop ALS, increase RNP 0.15 visibility to RVR 5500 and increase RNP 0.30 visibility to 1¾ SM.			MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct HUKUK and hold, continue climb-in-hold to 4000.	
D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC

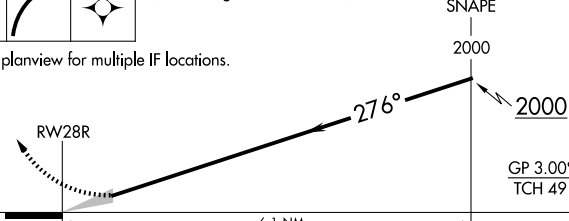

800	4000	HUKUK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).																
																			
See planview for multiple IF locations.																			
																			
SNAPE 2000																			
GP 3.00° TCH 49																			
<table><tr><td>CATEGORY</td><td>A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>RNP 0.15 DA</td><td colspan="2">362/40</td><td colspan="2">355 (300-¾)</td></tr><tr><td>RNP 0.30 DA</td><td colspan="2">618-1⅓</td><td colspan="2">611 (600-1⅓)</td></tr></table>					CATEGORY	A	B	C	D	RNP 0.15 DA	362/40		355 (300-¾)		RNP 0.30 DA	618-1⅓		611 (600-1⅓)	
CATEGORY	A	B	C	D															
RNP 0.15 DA	362/40		355 (300-¾)																
RNP 0.30 DA	618-1⅓		611 (600-1⅓)																
AUTHORIZATION REQUIRED																			