


RNAV (GPS) Z RWY 10L
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. Inop table does not apply to LPV all Cats. LNAV procedure NA during simultaneous operations. For inop LVS, increase LNAV/VNAV visibility all Cats to 1½ SM, LNAV visibility Cat A and B to RVR 5500 and Cats C/D to RVR 6000. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized.



MISSED APPROACH: Climb to 800 then climbing left turn to 4000 direct MARTS and hold. Continue climb-in-hold to 4000.

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
-----------------	--------------------------------	--------------------------------------	------------------	-------------------	-------

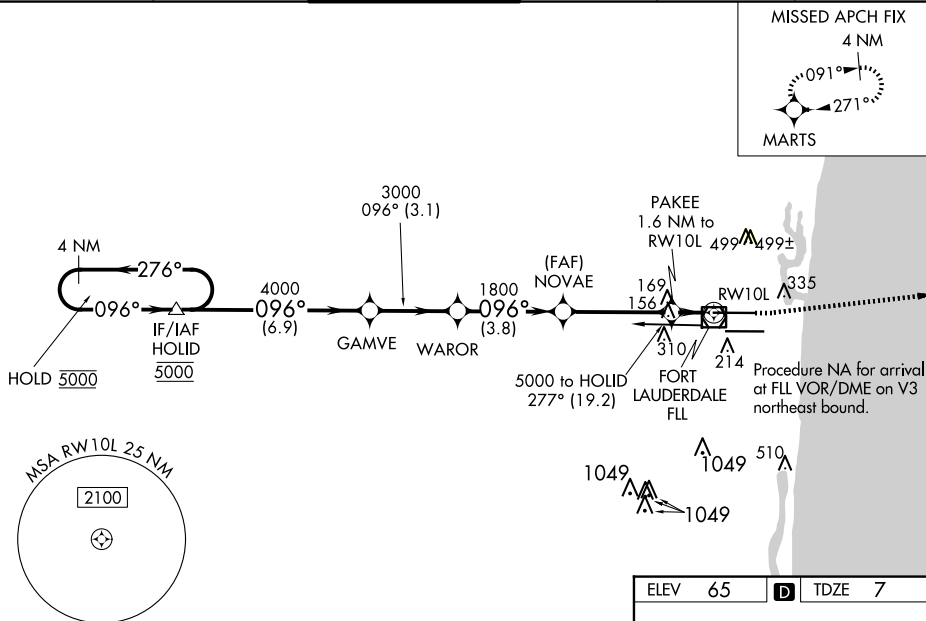

SE-3, 02 OCT 2025 to 30 OCT 2025

4 NM Holding Pattern

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 66).

HOLD

GAMVE

WAROR

NOVAE

PAKEE

1.6 NM to RW10L

1.1 NM to RW10L

1.1 NM

GP 3.00° TCH 49

5000

276°

096°

4000

3000

1800

560

6.9 NM

3.1 NM

3.8 NM

3.9 NM

0.5 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA		207/24	200 (200-½)	
RNAV/ VNAV DA		495/50	488 (500-1)	
RNAV MDA	420/24	413 (400-½)	420/40	413 (400-¾)
CIRCLING	680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)

