

WAAS CH 69338 W02A	APP CRS 023°	Rwy Ldg TDZE Apt Elev	3604 591 597
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2
GARY/CHICAGO INTL (GYY)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Rwy 2 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Chicago Midway Intl altimeter setting; increase LPV DA to 947 feet and visibility ⅛ SM, LNAV/VNAV DA to 1135 feet and visibility ¼ SM; increase all MDAs 60 feet and Circling Cats C and D visibility ¼ SM. Baro-VNAV NA when using Chicago Midway Intl altimeter setting.

MISSED APPROACH:
Climb to 2000 then climbing right turn to 2800 direct KILPY and hold.

ATIS 134.575	CHICAGO APP CON 133.1 285.6	GARY TOWER ★ 125.6 (CTAF) 0	GND CON 121.9
------------------------	---------------------------------------	---------------------------------------	-------------------------

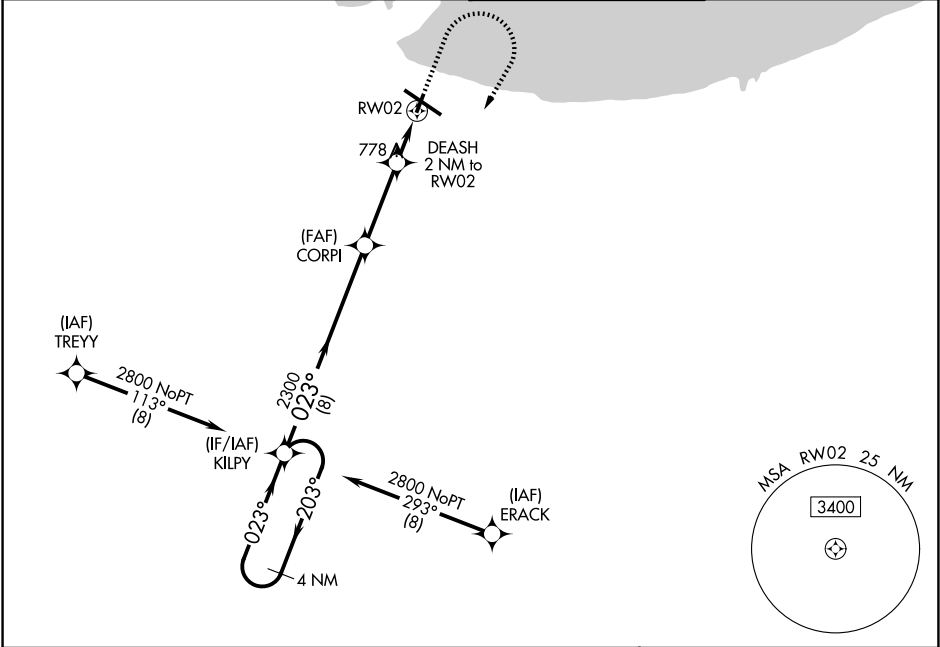

4 NM Holding Pattern KILPY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

2000 2800 KILPY

ELEV 597 TDZE 591

GP 3.00° TCH 60

2800 203° 023°

2300 023°

2300

DEASH 2 NM to RWY 2

RWY 2

8 NM 3.2 NM 2 NM

CATEGORY	A	B	C	D
LPV DA	901-7⁄8 310 (400-7⁄8)			
LNAV/VNAV DA	1089-1 3⁄8 498 (500-1 3⁄8)			
LNAV MDA	1040-1 449 (500-1)	1040-1 3⁄8 449 (500-1 3⁄8)		
CIRCLING	1140-1 543 (600-1)	1180-1 583 (600-1)	1400-2 1⁄4 803 (900-2 1⁄4)	1420-2 3⁄4 823 (900-2 3⁄4)

6850 x 150

20 02 00 00 00 00

2 TWIR

023°

1 MIRL Rwy 2-20

1 HIRL Rwy 12-30

1 REIL Rws 2, 12 and 20

EC-2, 02 OCT 2025 to 30 OCT 2025

EC-2, 02 OCT 2025 to 30 OCT 2025