

WAAS CH 45602 W21B	APP CRS 210°	Rwy Idg 6801 TDZE 626 Apt Elev 640
--	------------------------	---



RNAV (GPS) Z RWY 21
CHARLOTTESVILLE-ALBEMARLE (CHO)

RNP APCH.

- T** Baro-VNAV NA when using Staunton/Waynesboro/Harrisonburg altimeter setting.
For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C.
A When local altimeter setting not received, use Staunton/Waynesboro/Harrisonburg altimeter setting and increase all DA 130 feet and LPV visibility 1/8 mile.

MISSED APPROACH: Climb to 1100, then climbing left turn to 4000 direct GVE VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 0 338.275	GND CON 121.9 338.275	UNICOM 122.95
-----------------	-----------------------------------	---	--------------------------	------------------

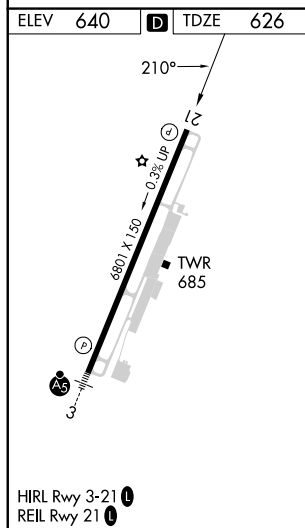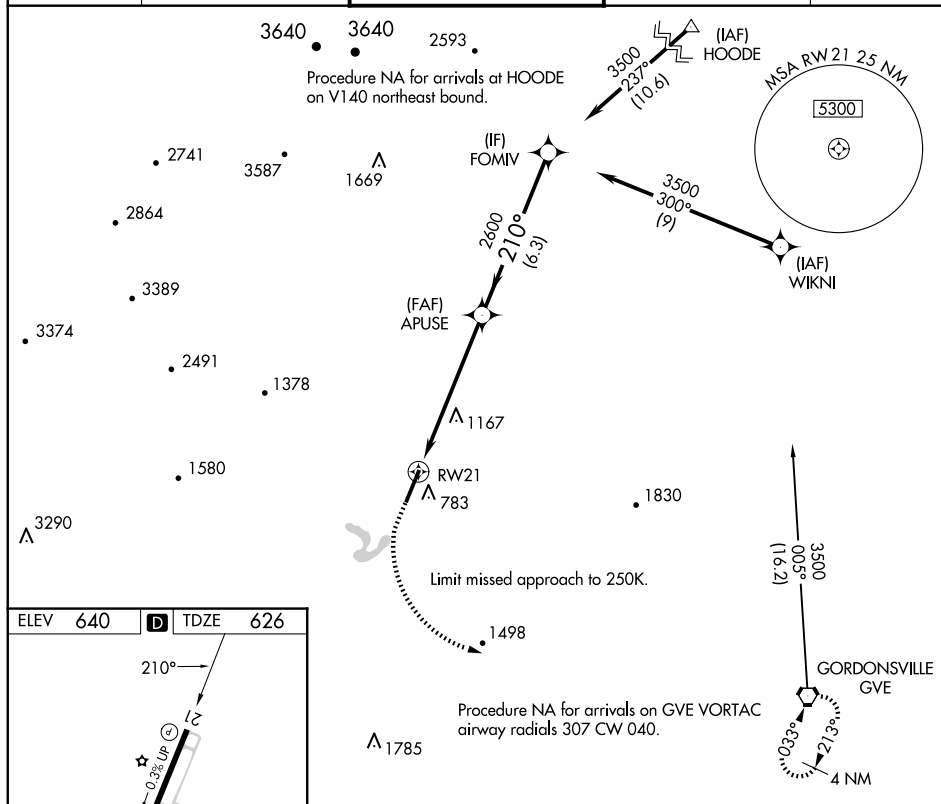

1100 4000 GVE

APUSE 2600

FOMIV 3500

RW21

210°

2600

6.1 NM 6.3 NM

GP 3.00
TCH 50

CATEGORY	A	B	C	D
LPV DA	826-1 200 (200-1)			
INAV/VNAV DA	1588-4 962 (1000-4)			