


LOC/DME I-JEF	APP CRS	Rwy Idg	6000
110.5	304°	TDZE	549
Chan 42		Apt Elev	549

ILS or LOC RWY 30

JEFFERSON CITY MEML (JEF)

ADF required. Circling Rwy 9 NA at night. For inop ALS increase S-LOC 30 Cats C/D visibility to 1¾ SM and WAPGY fix minimums: S-LOC 30 Cats C/D visibility to 1 SM.		MALSR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct ALGOA LOM and hold, continue climb-in-hold to 2800.	
ASOS 133.625	MIZZU APP CON 124.375 353.925	JEFFERSON CITY TOWER★ 125.6 (CTAF) 0	GND CON 121.7	UNICOM 122.95

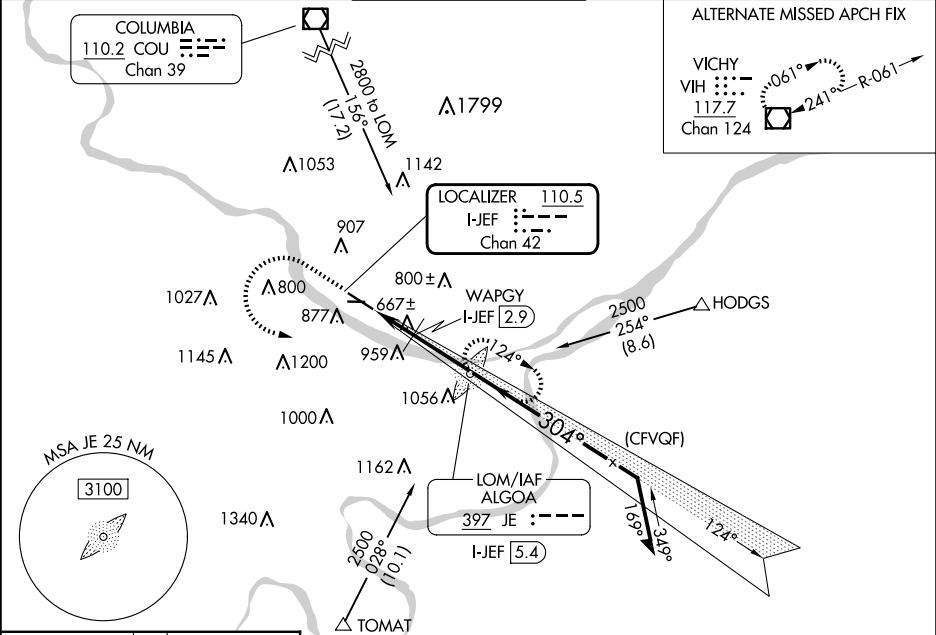

ELEV 549 TDZE 549

TWR 595
6000 X 100
3401 X 75
304°
304°

HIRL Rwy 12-30
MIRL Rwy 9-27
REIL Rws 9, 12, and 27

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

1500 ↑	2800 ↖	JE 	JE LOM ALGOA I-JEF 5.4	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).
			1941	
WAPGY I-JEF 2.9			2500	
I-JEF 1.2			2000	
1160				GS 3.00° TCH 54
-1 NM -0.8 -2.5 NM				
CATEGORY	A	B	C	D
S-ILS 30	749-½ 200 (200-½)			
S-LOC 30	1160-½ 611 (700-½)	1160-1¾ 611 (700-1¾)		
CIRCLING	1280-1 731 (800-1)	1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)	
WAPGY FIX MINIMUMS				
S-LOC 30	920-½ 371 (400-½)	920-⅝ 371 (400-⅝)		
CIRCLING	1280-1 731 (800-1)	1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)	