

APP CRS
100°

Rwy Ldg
TDZE
201

Apt Elev
201

RNAV (GPS) RWY 10

LAKE CITY GATEWAY (LCQ)

RNP APCH - GPS.


▼

▲

Rwy 10 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use GNV altimeter setting and increase all MDAs 100 feet, increase LNAV Cat C/D visibility ¾ SM and Circling Cat C visibility ½ SM and Cat D ¼ SM. Straight-in Rwy 10 NA at night, Circling Rwy 5, 10, 23 NA at night.

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct KRKLD and hold.

AWOS-3 120.675	JACKSONVILLE CENTER 125.375 254.325	LAKE CITY TOWER ★ 119.2 (CTAF) 0 314.6	GND CON 121.9	UNICOM 122.95
--------------------------	---	--	-------------------------	-------------------------

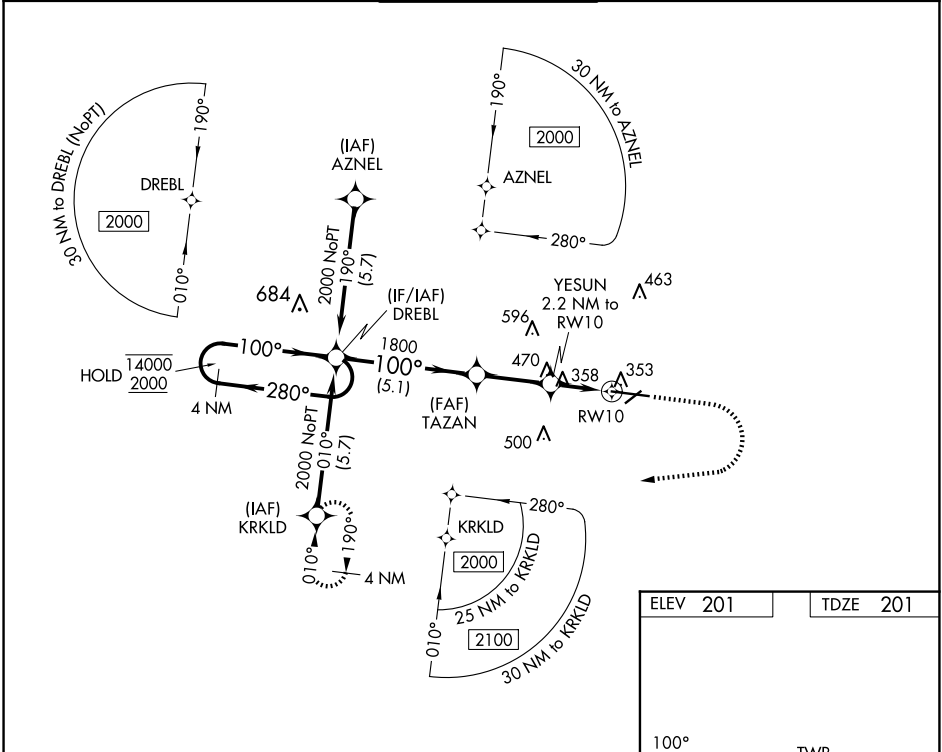

4 NM Holding Pattern

DREBL

14000
2000

280°

100°

100°

1800

3.00°

TCH 53

940

700

2000

KRKLD

YESUN 2.2 NM to RW10

RW10

5.1 NM

2.7 NM

2.2 NM

ELEV 201

TDZE 201

100°

10

28

TWR

8003 X 150

4000 X 75

CATEGORY	A	B	C	D
LNAV MDA	700-1	499 (500-1)	700-1¾	499 (500-1¾)
CIRCLING	760-1	559 (600-1)	780-1½ 579 (600-1½)	960-2½ 759 (800-2½)

REIL Rwy 10 and 28 0
MIRL Rwy 5-23 and 10-28 0