WAAS CH 82008 W28A	APP CRS 280°	Rwy ldg 8003 TDZE 196 Apt Elev 201

RNAV (GPS) RWY 28
LAKE CITY GATEWAY (LCQ)

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Gainesville altimeter setting: Increase LPV DA to 624 feet and all visibility ¼ SM; LNAV/VNAV DA to 640 feet and all visibility ⅜ SM; increase all MDAs 100 feet and LNAV visibility Cat C and D ¼ SM and Circling visibility Cat C ½ SM and Circling Cat D ¼ SM. Circling Rwy 10 NA at night. Rwy 13 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct JITUX and hold.

AWOS-3	JACKSONVILLE CENTER	LAKE CITY TOWER ★	GND CON	UNICOM
120.675	125.375 254.325	119.2 (CTAF) L 314.6	121.9	122.95

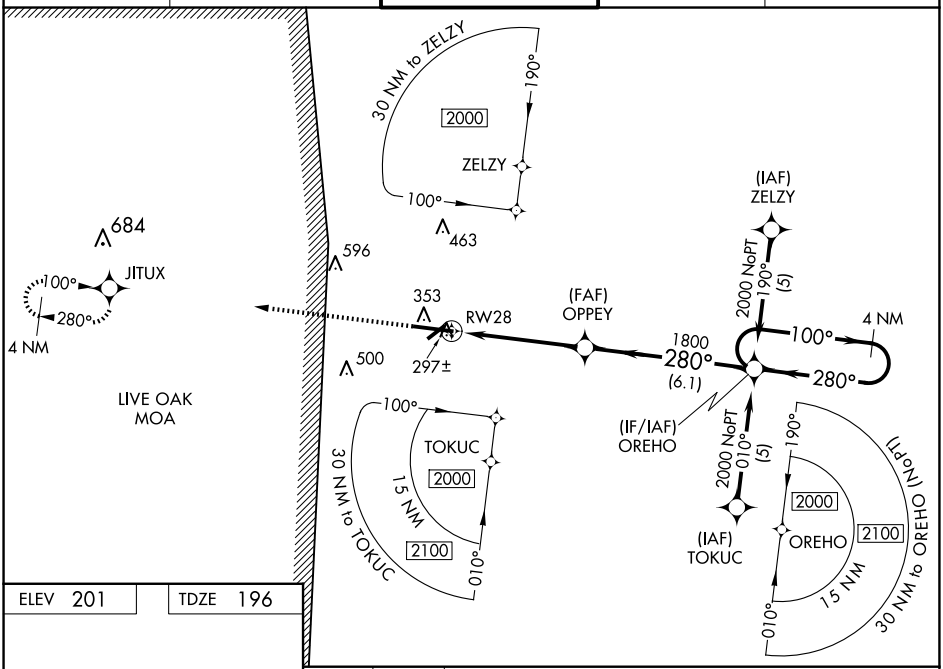

ELEV 201	TDZE 196

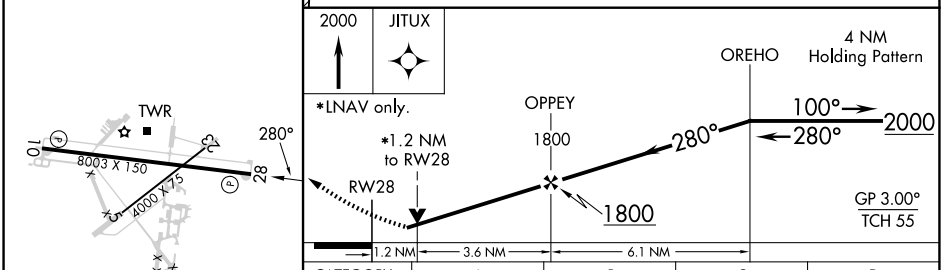

CATEGORY	A	B	C	D
LPV DA	540-1 344 (400-1)			
LNAV/VNAV DA	556-1 360 (400-1)			
LNAV MDA	640-1 444 (500-1)		640-1⅜ 444 (500-1⅜)	
CIRCLING	760-1 559 (600-1)		780-1½ 579 (600-1½)	960-2½ 759 (600-2½)

REIL Rwys 10 and 28 L
MIRL Rwys 5-23 and 10-28 L

SE-3, 02 OCT 2025 to 30 OCT 2025
SE-3, 02 OCT 2025 to 30 OCT 2025