


WAAS CH 78230 W13A	APP CRS 133°	Rwy Ldg TDZE 35 Apt Elev 36
--	------------------------	---


RNAV (GPS) Y RWY 13
VALLEY INTL (HRL)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct AMAPE and hold.
Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 327 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 327 feet and all visibilities ½ SM; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.	

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

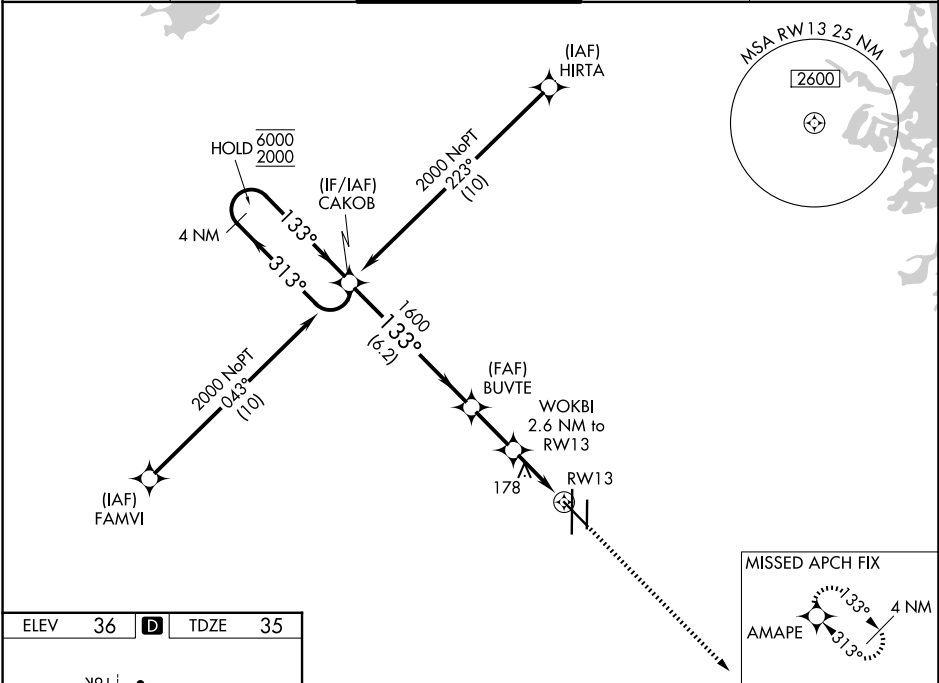

ELEV 36	D	TDZE 35
----------------	----------	----------------

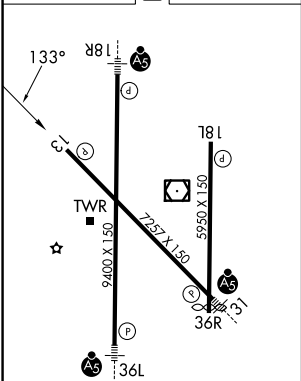

MIRL Rwy 18L-36R
REIL Rwy 13 and 18L
HIRL Rwy 13-31 and 18R-36L

4 NM Holding Pattern

CAKOB

2000

↑

AMAPE

6000

← 313°

2000

→ 133°

GP 3.00°

TCH 59

1600

133°

1600

920

6.2 NM

2.1 NM

1.5 NM

1.1

2.6 NM to RW13

1.1 NM to RW13

RW13

CATEGORY	A	B	C	D
LPV DA	285-¾		250 (300-¾)	
LNAV/VNAV DA	285-¾		250 (300-¾)	
LNAV MDA	440-1 405 (500-1)		440-1½ 405 (500-1½)	
CIRCLING	460-1 424 (500-1)	560-1 524 (600-1)	600-1½ 564 (600-1½)	680-2 644 (700-2)