

APP CRS	Rwy Ldg	6215
233°	TDZE	931
	Apt Elev	947

RNAV (RNP) Z RWY 23
WEST VIRGINIA INTL YEAGER (CRW)

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below -15°C or
A above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.

ALSF-1




MISSED APPROACH:
Climb to 4000 on track
233° to CITMA and hold.

ATIS
127.6

CHARLESTON APP CON
124.1 269.125

CHARLESTON TOWER
125.7 257.8

GND CON
121.8 348.6

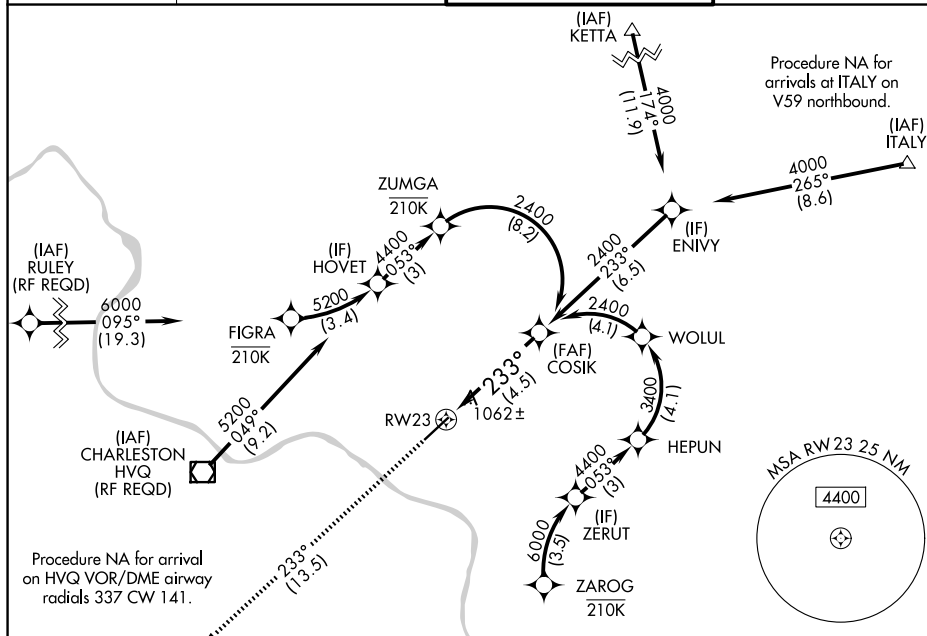

Procedure NA for arrival
on HVQ VOR/DME airway
radials 337 CW 141.



ELEV 947	D	TDZE 931
----------	----------	----------

4000 ↑ tr 233°	CITMA 
----------------------	--

See planview for multiple IF locations.

Technical drawing of a part with a 233° angle. The drawing includes a top view with a 233° angle and a side view showing a 233° angle. The part is labeled with dimensions: 2400, 2400, and 233°. The drawing is titled "GP 3" and "TCH".

CATEGORY	A	B	C	D
RNP 0.30 DA	1419/60 488 (500-1¼)			

HIRL Rwy 5-23
REIL Rwy 5

AUTHORIZATION REQUIRED

CHARLESTON, WEST VIRGINIA
Orig-C 07SEP23

38°23'N-81°36'W

WEST VIRGINIA INTL YEAGER (CRW)
RNAV (RNP) Z RWY 23

NE-4, 02 OCT 2025 to 30 OCT 2025