

WAAS
CH **77712**
W18A

APP CRS
182°

Rwy Ldg **7150**
TDZE **344**
Apt Elev **346**

RNAV (GPS) RWY 18

TUPELO RGNL (TUP)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ½ mile and Circling Cats C and D ½ mile. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH:
Climb to 3000 direct GAGYE and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

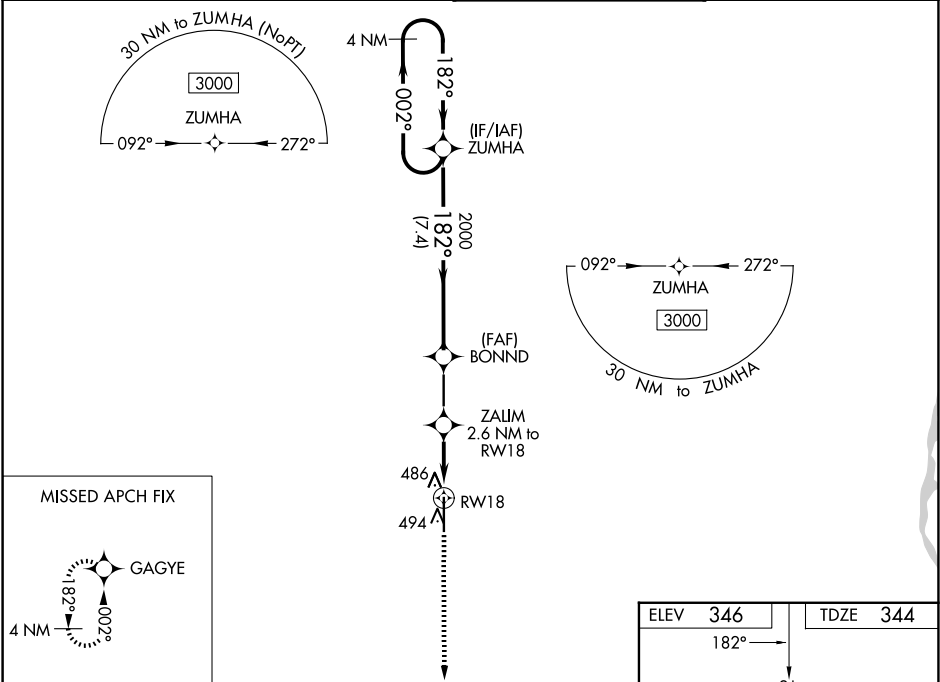

3000

GAGYE

*LNAV only.

RW18

ZAIM 2.6 NM to RW18

BONND 2000

ZUMHA 4 NM Holding Pattern

1.1 NM

1.5 NM

2.5 NM

7.4 NM

1200

182°

002°

3000

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA		544-¾	200 (200-¾)	
LNAV/VNAV DA		659-1	315 (400-1)	
LNAV MDA	740-1	396 (400-1)	740-1⅛	396 (400-1⅛)
CIRCLING	820-1	474 (500-1)	900-1½ 554 (600-1½)	1140-2½ 794 (800-2½)

ELEV 346

TDZE 344

182°

81

71.50 X 150

TWR

36

HIRL Rwy 18-36 0

REIL Rwy 18 0