

TUPELO, MISSISSIPPI

AL-854 (FAA)

25275

VOR/DME OTB 109.8 Chan 35	APP CRS 196°	Rwy Ldg 7150 TDZE 344 Apt Elev 347
---	------------------------	---


VOR RWY 18
TUPELO RGNL (TUP)

RADAR required for procedure entry. DME required.

T When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet. Increase S-18 Cat C/D visibility $\frac{3}{8}$ SM; increase Circling Cat C/D visibility $\frac{1}{2}$ SM. VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on OTB VOR/DME R-016 to PYLIP/OTB 8.6 DME and hold.


ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

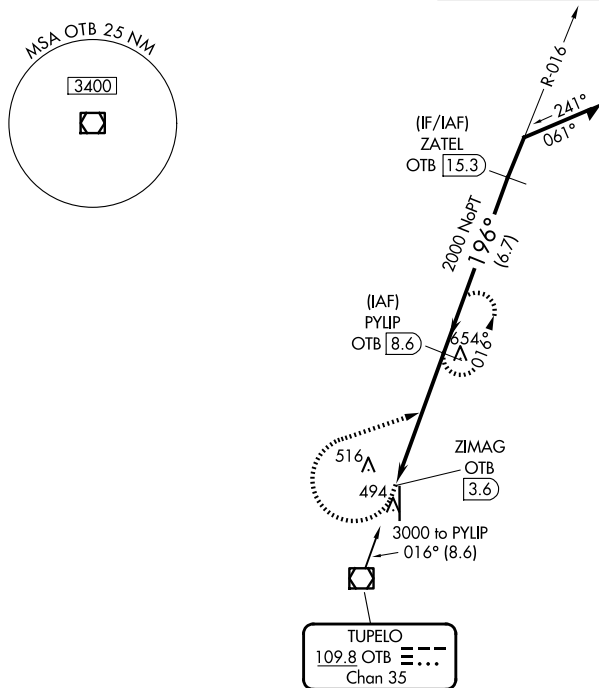

The diagram illustrates a flight path with the following details:

- Altitude Markers:** 1500, 3000, PYLIP OTB 8.6, ZIMAG OTB 3.6, OTB 4.8, OTB 8.6, and 2200.
- Altitude Change:** A curved arrow indicates a climb from 1500 to 3000.
- Distance Segments:** 1.2 NM and 3.8 NM.
- Angles:** 016°, 196°, and a turn angle of $\leq 3.01^\circ$ TCH 45°.
- Other Labels:** "Remain within 10 NM" and "2000" (marked with a cross).

CATEGORY	A	B	C	D
S-18	780-1	436 (500-1)	780-1¼	436 (500-1¼)
CIRCLING	820-1	473 (500-1)	900-1½ 553 (600-1½)	1140-2½ 793 (800-2½)

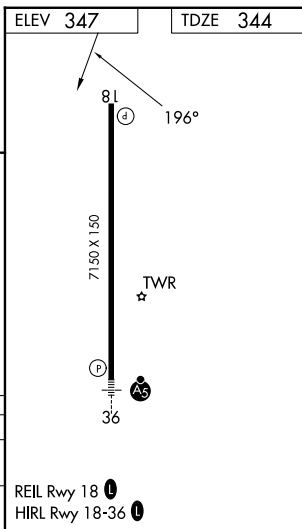

SC-4, 02 OCT 2025 to 30 OCT 2025

TUPELO, MISSISSIPPI
Amdt 1 C 27FEB20

34°16'N-88°46'W

TUPELO RGNL (TUP)
VOR RWY 18