


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>49034</b><br><b>W17A</b> | APP CRS<br><b>171°</b> | Rwy Idg<br>TDZE <b>782</b><br>Apt Elev <b>782</b> |
|----------------------------------------|------------------------|---------------------------------------------------|


RNAV (GPS) RWY 17  
ANDERSON RGNL (AND)

|                                                                                                                                                                                                                                                                                                                                                |                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| <p><b>▼</b> DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clemson altimeter setting and increase all MDA 60 feet and increase LP, LNAV and Circling Cts C/D visibility ¼ mile.</p> <p><b>▲</b> Straight-in Rwy 17 NA at night, Circling Rwy 17, 35 NA at night. 17, 35 helicopter visibility reduction below 1 SM NA.</p> | <p><b>MISSED APPROACH:</b> Climb to 2500 direct ZAROM and hold.</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|

|                        |                                         |                       |
|------------------------|-----------------------------------------|-----------------------|
| ASOS<br><b>120.675</b> | GREER APP CON ★<br><b>118.8 270.275</b> | CTAF<br><b>123.60</b> |
|------------------------|-----------------------------------------|-----------------------|

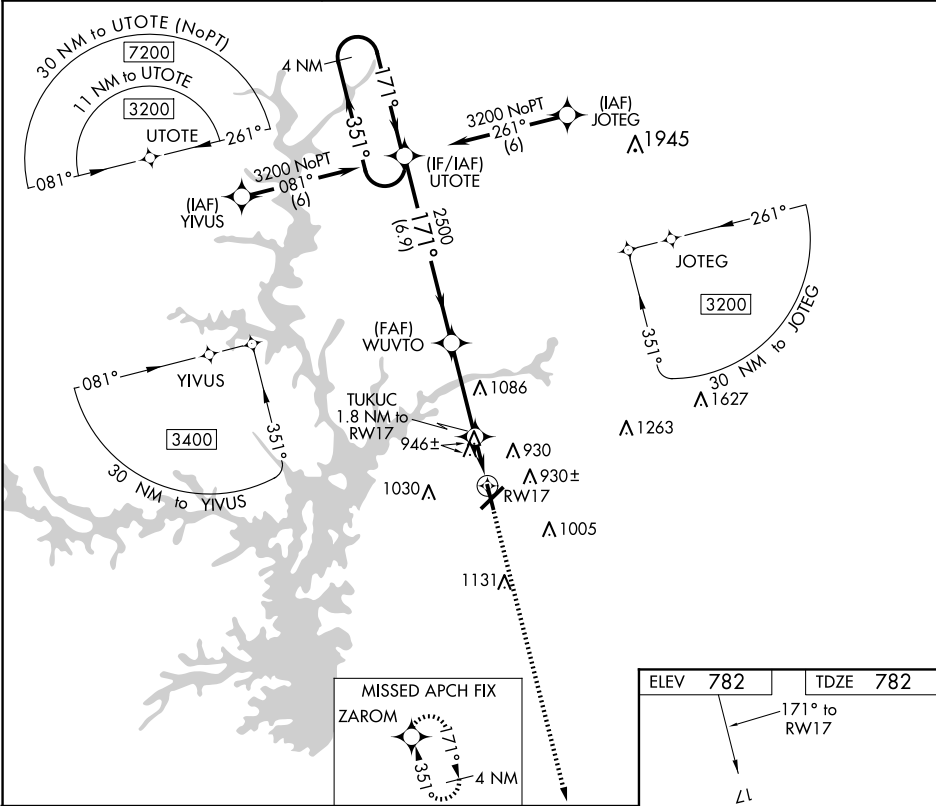

|                                        |                       |                       |                         |                         |
|----------------------------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| 4 NM Holding Pattern UTOTE             |                       |                       |                         |                         |
| 3200 ← 351° 171° → 171° 2500 1400 RW17 |                       |                       |                         |                         |
| 6.9 NM 3.5 NM 1.8 NM                   |                       |                       |                         |                         |
| CATEGORY                               | A                     | B                     | C                       | D                       |
| LP MDA                                 | 1200-1                | 418 (500-1)           | 1200-1½                 | 418 (500-1½)            |
| LNAV MDA                               | 1220-1                | 438 (500-1)           | 1220-1¼                 | 438 (500-1¼)            |
| CIRCLING                               | 1260-1<br>478 (500-1) | 1320-1<br>538 (600-1) | 1440-1¾<br>658 (700-1¾) | 1500-2¼<br>718 (800-2¼) |

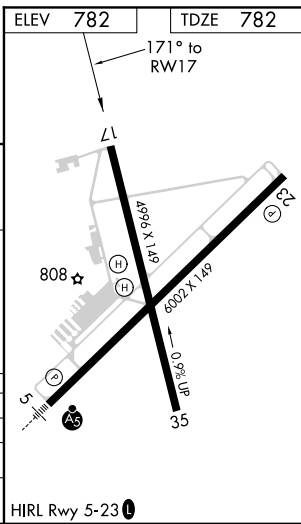

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025