

LOC/DME I-TYN
110.9
Chan **46**

APP CRS
036°

Rwy Ldg **8000**
TDZE **40**
Apt Elev **42**

ILS or LOC RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)


DME required for procedure entry and for LOC only.

⚠

Rwy 4R helicopter visibility reduction below ¼ SM NA. VDP NA when using Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase S-ILS 4R and S-LOC 4R visibility all Cats ½ SM, Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 on LFT R-035 to BEDDY INT/LFT 18.9 DME and hold.

ATIS 134.05	LAFAYETTE APP CON ★ 121.1 363.0	LAFAYETTE TOWER ★ 118.5 (CTAF) 0 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

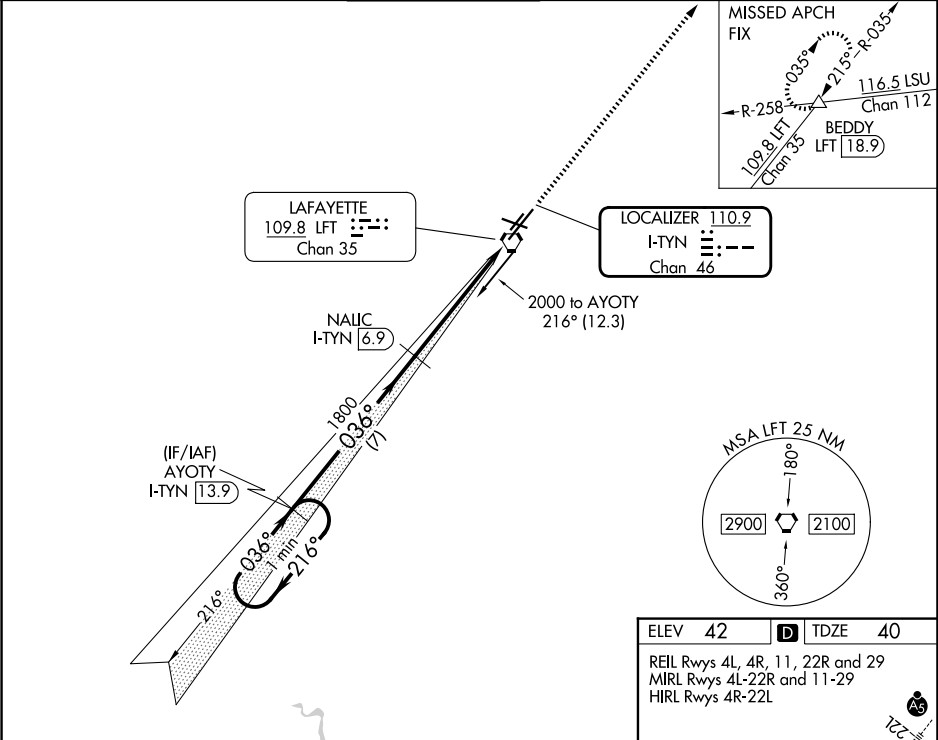

One Minute Holding Pattern

AYOTY I-TYN [13.9]

NAUIC I-TYN [6.9]

2000 ← 216° / 036° →

GS 3.00° TCH 49

7 NM, 4.1 NM, 1.3 NM

2000, BEDDY, LFT R-035, *LOC only.

CATEGORY	A	B	C	D
S-ILS 4R	316-7/8 276 (300-7/8)			
S-LOC 4R	500-1 460 (500-1)		500-13/8 460 (500-13/8)	
CIRCLING	540-1 498 (500-1)	580-1 538 (600-1)	700-13/4 658 (700-13/4)	700-2 658 (700-2)

ELEV 42 D TDZE 40

REIL Rwy 4L, 4R, 11, 22R and 29
MIRL Rwy 4L-22R and 11-29
HIRL Rwy 4R-22L

Diagram of RWY 4R with TWY 4L, 4R, 11, 22R, 29, 20, 18, 16, 14, 12, 10, 8, 6, 4, 2, 0. Distances: 5403 X 150, 4098 X 175, 6000 X 150.