

WAAS CH 45903 W04A	APP CRS 036°	Rwy Ldg 8000 TDZE 40 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

RNP APCH.


▼

▲

Rwy 4R helicopter visibility reduction below $\frac{3}{4}$ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct BEDDY and hold.

ATIS 134.05	LAFAYETTE APP CON ★ 121.1 363.0	LAFAYETTE TOWER ★ 118.5 (CTAF) 0 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

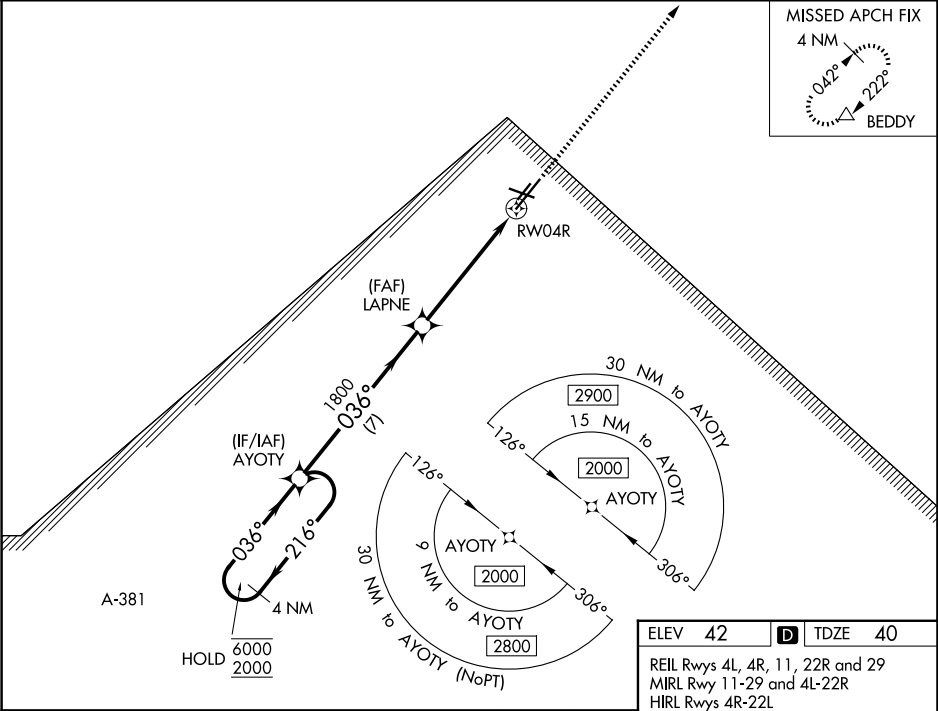

4 NM Holding Pattern

AYOTY

6000
2000

← 216°

036° →

GP 3.00°
TCH 49

1800

LAPNE

1800

7 NM

4.1 NM

1.3

2000

BEDDY

* LNAV only.

* 1.3 NM to RWY 04R

CATEGORY	A	B	C	D
LPV DA		317- $\frac{7}{8}$	277 (300- $\frac{7}{8}$)	
LNAV/VNAV DA		440-1 $\frac{1}{8}$	400 (400-1 $\frac{1}{8}$)	
LNAV MDA	500-1	460 (500-1)	500-1 $\frac{3}{8}$	460 (500-1 $\frac{3}{8}$)
CIRCLING	500-1 458 (500-1)	580-1 538 (600-1)	700-1 $\frac{3}{4}$ 658 (700-1 $\frac{3}{4}$)	700-2 658 (700-2)

ELEV 42 D TDZE 40

REIL Rwys 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwys 4R-22L

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025