

RNP APCH.

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C/D visibility to RVR 5500.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:

Climb to 2500 direct ANEPE and hold.

ATIS 124.1	GREEN BAY APP CON★ 119.4 338.2	GREEN BAY TOWER★ 118.7(CTAF) 257.8	GND CON 121.9
---------------	-----------------------------------	---------------------------------------	------------------

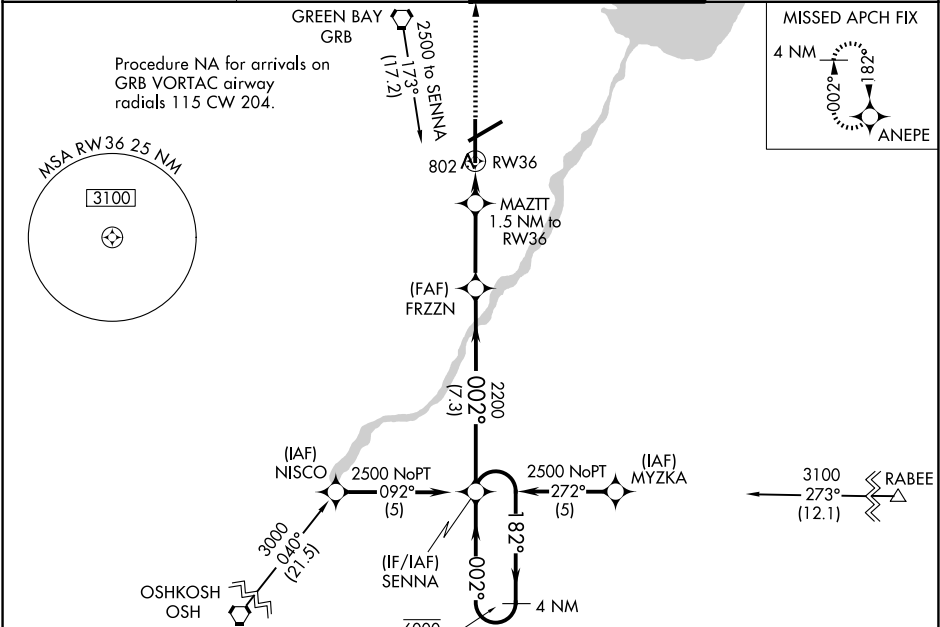

ELEV 695	D	TDZE 684
HIRL Rwy 6-24 and 18-36 REIL Rwy 18		
2500 ANEPE		
* LNAV only.		
RW36		
MAZTT 1.5 NM to RW36		
FRZZN		
SENN		
1200*		
2200		
182°		
002°		
6000 2500		
GP 3.00° TCH 50		
1.5 NM 3.1 NM 7.3 NM		
CATEGORY	A	B C D
LPV DA	884/24	200 (200-½)
LNAV/VNAV DA	1097/40	413 (500-¾)
LNAV MDA	1060/24	376 (400-½) 1060/35 376 (400-¾)
CIRCLING	1200-1	505 (600-1) 1300-1¾ 605 (700-1¾) 1300-2 605 (700-2)