

|            |         |          |      |
|------------|---------|----------|------|
| VORTAC TWF | APP CRS | Rwy Ldg  | 8704 |
| 113.1      | 248°    | TDZE     | 4154 |
| Chan 78    |         | Apt Elev | 4154 |


VOR RWY 26  
JOSLIN FLD/MAGIC VALLEY RGNL (TWF)

**⚠** Night landing: Rwy 30 NA. VDP NA with Jerome altimeter setting. When local altimeter setting not received, use Jerome altimeter setting and increase all MDA 60 feet; increase S-26 Cat A visibility ¼ mile, Cat C/D ½ mile, Circling Cat C ¼ mile, and XULXU FIX S-26 Cat C/D ½ mile. For inop MALSR, increase S-26 Cat C/D visibility to 2½ miles; when using Jerome altimeter setting increase XULXU FIX S-26 Cat C/D visibility to 1½ mile.

**MALSR**

**MISSED APPROACH:** Climb to 6000 on TWF VORTAC R-248 then right turn direct TWF VORTAC and hold.

|                 |                                      |                                          |                  |                    |                  |
|-----------------|--------------------------------------|------------------------------------------|------------------|--------------------|------------------|
| ASOS<br>135.025 | TWIN FALLS APP CON ★<br>126.7 353.75 | TWIN FALLS TOWER ★<br>118.2 (CTAF) 317.5 | GND CON<br>121.7 | CLNC DEL<br>123.65 | UNICOM<br>122.95 |
|-----------------|--------------------------------------|------------------------------------------|------------------|--------------------|------------------|

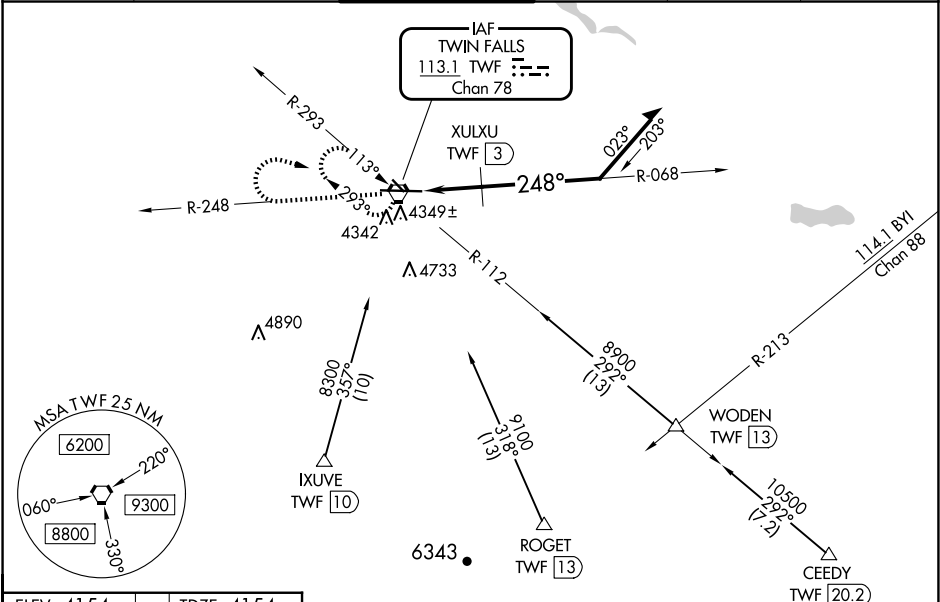

ELEV 4154 TDZE 4154

REIL Rwy 8 1  
HIRL Rwy 8-26 1

6000 TWF R-248 TWF

10000 TWF VORTAC

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 55).

Remain within 10 NM

068° 248°

6000 5000

3.43 TCH 55

1.2 NM 0.9 NM

| CATEGORY           | A                       | B                        | C                        | D                      |
|--------------------|-------------------------|--------------------------|--------------------------|------------------------|
| S-26               | 5000-½<br>846 (900-½)   | 5000-¾<br>846 (900-¾)    | 5000-1⅞<br>846 (900-1⅞)  | 846 (900-1⅞)           |
| CIRCLING           | 5000-1¼<br>846 (900-1¼) | 5100-2¾<br>946 (1000-2¾) | 5100-3<br>946 (1000-3)   | 5100-3<br>946 (1000-3) |
| XULXU FIX MINIMUMS |                         |                          |                          |                        |
| S-26               | 4600-½<br>546 (600-½)   | 446 (500-½)              | 4600-⅞<br>546 (500-⅞)    | 446 (500-⅞)            |
| CIRCLING           | 4700-1<br>546 (600-1)   | 4780-1<br>626 (700-1)    | 5100-2¾<br>946 (1000-2¾) | 5100-3<br>946 (1000-3) |

NW-1, 02 OCT 2025 to 30 OCT 2025

NW-1, 02 OCT 2025 to 30 OCT 2025