


WAAS	APP CRS	Rwy Ldg	6802
CH 65706	064°	TDZE	569
W06A		Apt Elev	569

RNAV (GPS) RWY 6
NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS. Baro-VNAV and VDP NA when using Anniston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Anniston altimeter setting and increase LPV DA to 835, LNAV/VNAV DA to 1040 and all MDA 80 feet; increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats 1/4 SM and increase LNAV Cats C/D and Circling Cat C visibility 1/4 SM.		MISSED APPROACH: Climb to 1300 then climbing left turn to 3500 direct SNEAR and hold.	
AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0

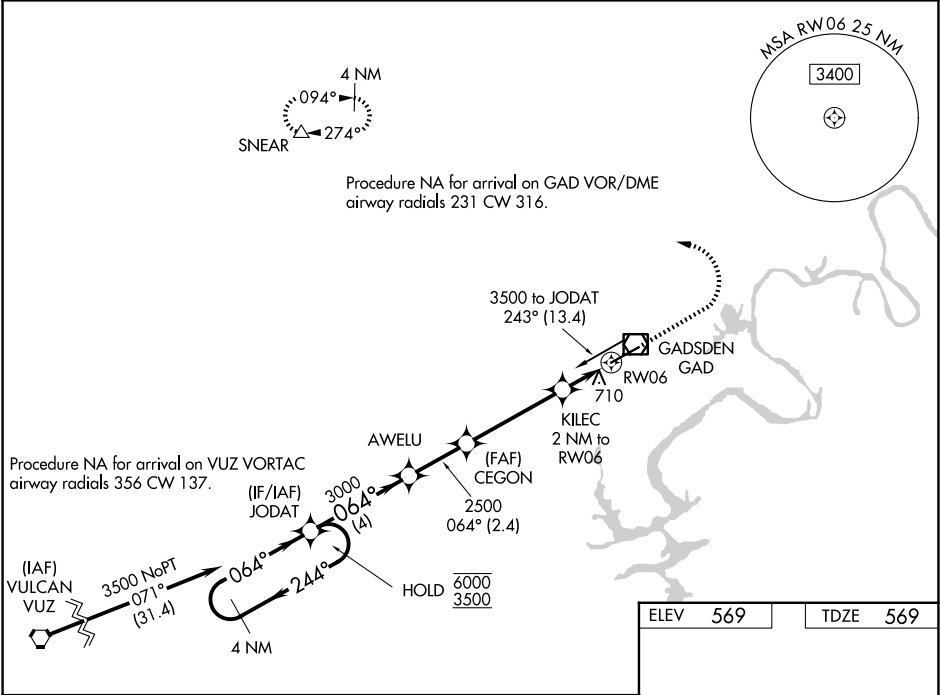

4 NM Holding Pattern		JODAT	AWELU	CEGON	KILEC 2 NM to RW06	1300	3500	SNEAR
6000 ← 244°		064°	064°	2500	1.1 NM to RW06	1300	3500	SNEAR
3500 → 064°		3000	2500	1240	1.1 NM to RW06	1300	3500	SNEAR
GP 3.00° TCH 40		2500	1240	1.1 NM to RW06	1.1 NM to RW06	1300	3500	SNEAR
4 NM		2.4 NM	3.9 NM	0.9 NM	1.1 NM	1300	3500	SNEAR
CATEGORY	A	B	C	D				
LPV DA		769-3/4	200 (200-3/4)					
LNAV/VNAV DA		960-1 1/8	391 (400-1 1/8)					
LNAV MDA	960-1	391 (400-1)	960-1 1/8	391 (400-1 1/8)				
CIRCLING	1100-1	531 (600-1)	1440-2 1/2 871 (900-2 1/2)	1680-3 1111 (1200-3)				

