


ATIS ★ 133.475 352.0  
CLNC DEL  
125.975 254.325  
GND CON  
128.625 307.325  
FOSS TOWER ★  
135.2 298.925  
SOCAL DEP CON  
119.6 363.1 W

SHL-903 [USN]

|       |          |     |      |      |      |      |      |
|-------|----------|-----|------|------|------|------|------|
| Rwy   | Knots    | 60  | 120  | 180  | 240  | 300  | 360  |
| 24L/R | V/V(fpm) | 780 | 1560 | 2340 | 3120 | 3900 | 4680 |

### ATC Climb Rate to 2000

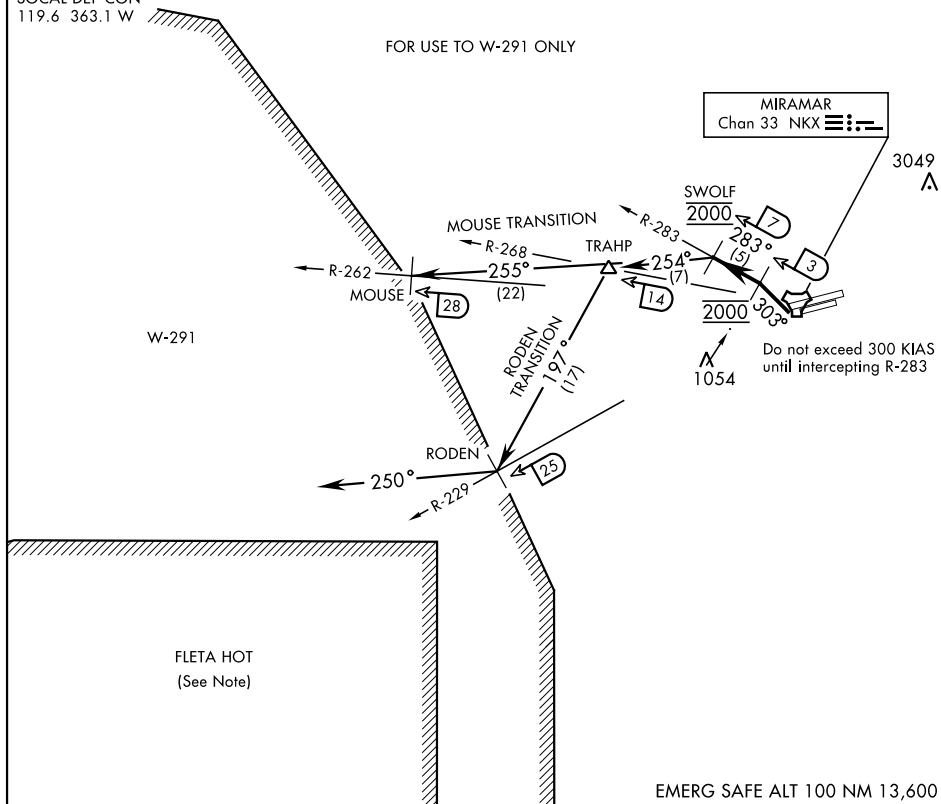

## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 24L/R: Climbing right turn to 2000 via heading 303° to intercept and proceed via NKX TACAN R-283 to SWOLF. Complete turn within NKX 2 DME. Cross NKX R-283/3 DME at 2000 mandatory. Maintain 2000 at SWOLF mandatory. Thence...

MOUSE TRANSITION (SWOLF9 • MOUSE): Turn left heading 255° to intercept NKX R-262 at MOUSE. Maintain 2000 for entry into W-291.

(Continued on next page)