


LOC I-MSS 108.7	APP CRS 045°	Rwy Ldg TDZE Apt Elev
		5601 205 221

ILS or LOC RWY 5


MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.	MISSED APPROACH: Climb to 1200 then climbing left turn to 2300 direct MISSE LOM and hold.
Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use PTD altimeter setting: increase S-ILS 5 DA to 528 feet and all visibilities ¼ SM; increase all MDAs 80 feet and S-LOC 5 visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.	

ASOS 128.075	BOSTON CENTER 135.25 377.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

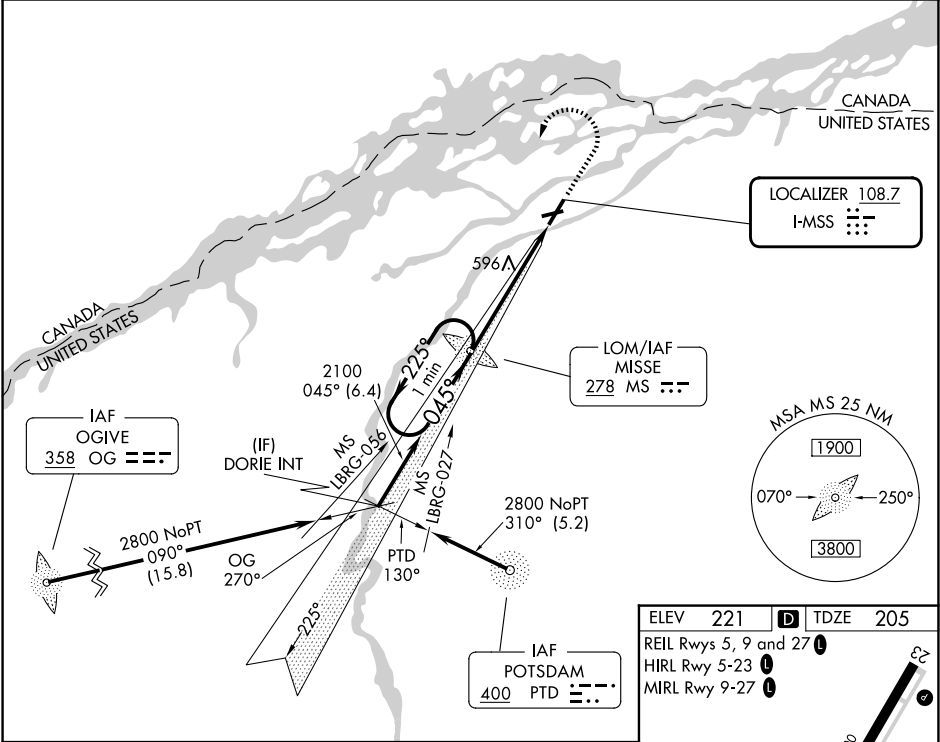

One Minute Holding Pattern		MISSE LOM		1200	2300	MS
2300 ← 225°		1994				
GS 3.00°		2100				
TCH 54						
		5.4 NM				
CATEGORY	A	B	C	D		
S-ILS 5		455-¾	250 (300-¾)			
S-LOC 5	800-1	595 (600-1)	800-1¾	595 (600-1¾)		
CIRCLING	800-1	579 (600-1)	880-1¾	900-2¼		
			659 (700-1¾)	679 (700-2¼)		

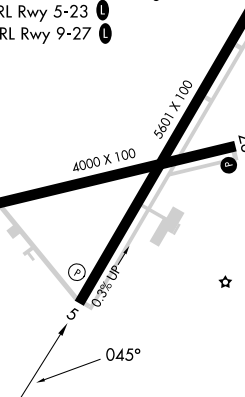ELEV	221	D	TDZE	205	
REIL Rwy 5, 9 and 27 L					
HIRL Rwy 5-23 L					
MIRL Rwy 9-27 L					
					
FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48