

WAAS  
CH **70303**  
**W05A**

APP CRS  
**045°**

Rwy Ldg  
TDZE **205**  
Apt Elev **221**

RNAV (GPS) RWY 5

MASSENA INTL-RICHARDS FLD (MSS)

RNP APCH - GPS.


▼

▲

Circling Rwy 9, 23, 27 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use PTD altimeter setting: increase LPV DA to 528 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 933 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct HODSA and on track 135° to HINED and hold.

|                        |                                      |                                 |
|------------------------|--------------------------------------|---------------------------------|
| ASOS<br><b>128.075</b> | BOSTON CENTER<br><b>135.25 377.1</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|------------------------|--------------------------------------|---------------------------------|

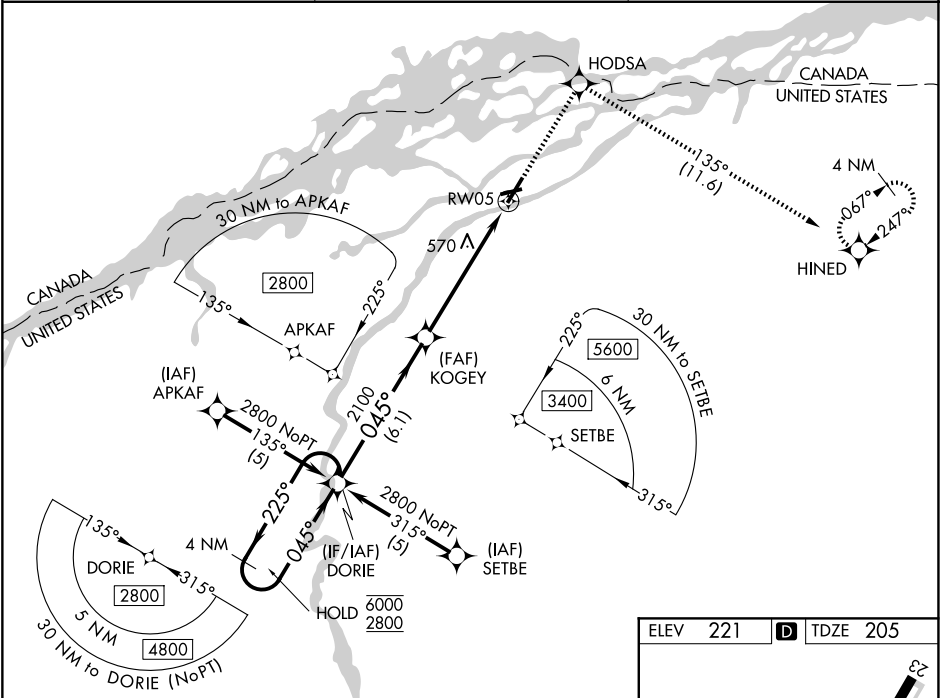

4 NM Holding Pattern

DORIE

6000  
2800

←225°  
→045°

GP 3.00°  
TCH 54

6.1 NM

3.8 NM

1.9 NM

KOGEY

2100

1.9 NM to RW05

RW05

3000

HODSA

tr 135°

HINED

| CATEGORY     | A     | B           | C            | D            |
|--------------|-------|-------------|--------------|--------------|
| LPV DA       |       | 455-3¼      | 250 (300-¾)  |              |
| LNAV/VNAV DA |       | 860-1⅞      | 655 (700-1⅞) |              |
| LNAV MDA     | 860-1 | 655 (700-1) | 860-1⅞       | 655 (700-1⅞) |
| CIRCLING     | 860-1 | 639 (700-1) | 880-1⅞       | 900-2¼       |
|              |       |             | 659 (700-1⅞) | 679 (700-2¼) |

