


LOC I-GNK <u>110.9</u>	APP CRS 311°	Rwy Idg 6499 TDZE 681 Apt Elev 694
----------------------------------	------------------------	---


ILS or LOC RWY 31
LAGRANGE/CALLAWAY (LGC)

DME required for procedure entry.
RADAR and DME required for LOC only.



MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct LGC VORTAC and hold.

AWOS-3 126.325	ATLANTA APP CON★ 125.5 323.1	CLNC DEL 119.25	UNICOM 122.975 (CTAF) 1
--------------------------	--	---------------------------	--

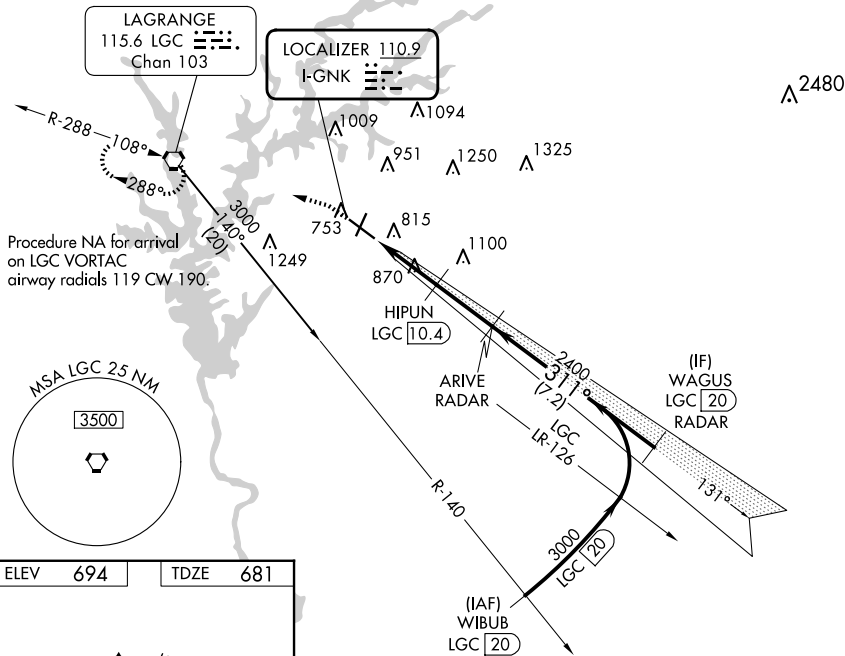

ELEV	694		TDZE	681
------	-----	--	------	-----




Figure 1 illustrates a 4th step climb profile. The profile starts at 1200 ft, passes through 2400 ft, and reaches 3000 ft. Key points include LGC 7.7, LGC 8.9, HIPUN LGC 10.4, ARIVE RADAR, and WAGUS LGC 20. The profile is divided into segments A, B, C, and D. The climb rate is 311° and the ground speed is 3.00° TCH 41. The profile is labeled 'LOC only'.

CATEGORY	A	B	C	D
S-ILS 31		881-1/2	200 (200-1/2)	
S-LOC 31	1120-1/2	439 (500-1/2)	1120-3/4	439 (500-3/4)
C CIRCLING	1280-1	586 (600-1)	1540-2 1/2 846 (900-2 1/2)	1600-3 906 (1000-3)