

RNAV (GPS) RWY 14

WAAS Chan 91240 W14A	APCH CRS 140°	Rwy Idg TDZE Arpt Elev 8000 32 37
--	-------------------------	--

[USN]


BEAUFORT MCAS (MERRITT FLD) (KNBC)

RNP APCH	MISSED APPROACH: Climb to 700, then climbing left turn to 3000 direct MEECH and hold.
RADAR required for arrivals via KASKE or FARRL IAFs.	

ATIS ★ 279.525	APP CON (ABV 3000) 125.125 292.125 (3000 and BLW) 123.7 269.125	TOWER ★ 119.05 342.875	GND CON 128.15 348.625	CLNC DEL 128.15 254.375	ASR/ PAR
--------------------------	---	----------------------------------	----------------------------------	-----------------------------------	-------------

For uncompensated Baro-VNAV systems,
LNAV/VNAV NA below -15°C (-5°F)
or above 54° C (130° F).

CAUTION: WCH Group 4 is 15 ft.

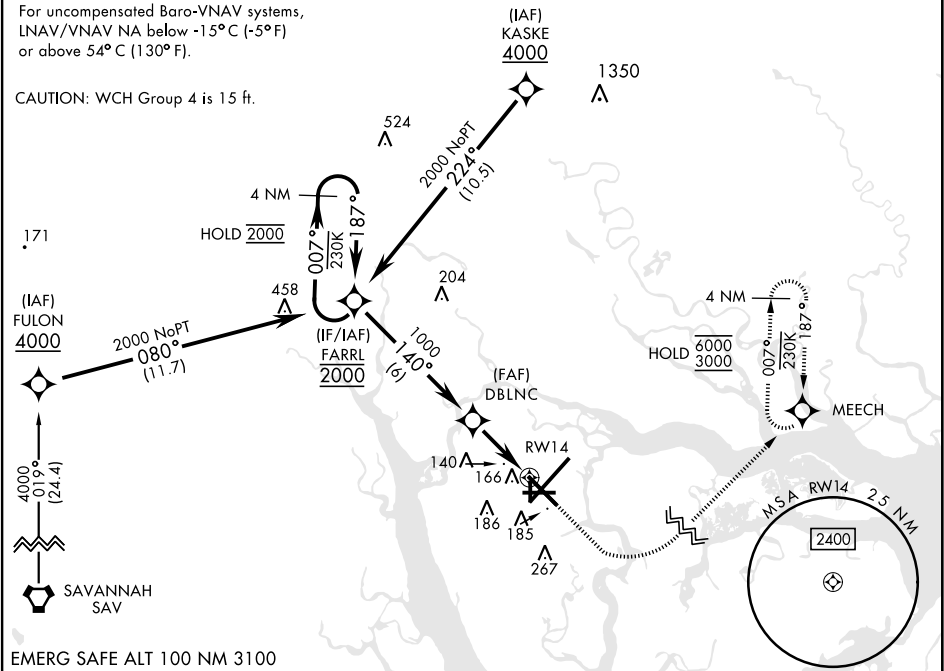

4 NM Holding Pattern FARRL	700	3000	MEECH	ELEV 37	TDZE 32
GP 3.00° TCH 40					
CATEGORY	A	B	C	D	
LPV DA	232-3/4	200	(200-3/4)		
LNAV/VNAV DA	416-1 1/8	384	(400-1 1/8)		
LNAV MDA	420-1 388 (400-1)	420-1 1/8 388 (400-1 1/8)			
CIRCLING	560-1 523 (600-1)	580-1 1/2 543 (600-1 1/2)	600-2 563 (600-2)		

RNAV (GPS) RWY 14