


ILS or LOC RWY 9L
ORLANDO SANFORD INTL (SFB)

ATIS 125.975	ORLANDO APP CON 135.3 351.9 (N) 119.775 351.9 (S)	SANFORD TOWER★ 120.3(CTAF) 0 254.35	GND CON 121.35 254.35	CLNC DEL 123.975	CLNC DEL 121.35 (When twr closed)
-----------------	---	--	--------------------------	---------------------	---

*600 when using Orlando Exec altimeter setting.	500	2000	ORL	SMYRA	ELEV	55	TDZE	55
---	-----	------	-----	-------	------	----	------	----

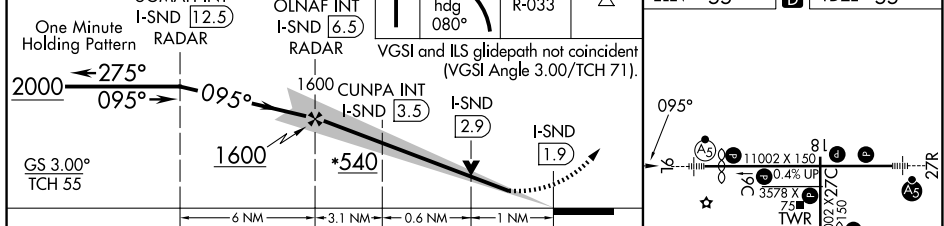

CATEGORY	A	B	C	D
S-ILS 9L	255-1/2 200 (200-1/2)			
S-LOC 9L	540-1/2 485 (500-1/2)		540-1 485 (500-1)	
CIRCLING	580-1 525 (600-1)		600-1 1/2 545 (600-1 1/2)	640-2 585 (600-2)
CUNPA FIX MINIMUMS (DUAL VOR RECEIVER OR DME REQUIRED)				
S-LOC 9L	460-1/2 405 (500-1/2)		460-3/4 405 (500-3/4)	
CIRCLING	580-1 525 (600-1)		600-1 1/2 545 (600-1 1/2)	640-2 585 (600-2)

MIRL Rwy 9C-27C and 18-36 **L**

HIRL Rwy 9L-27R and 9R-27L **L**

REIL Rwy 9C, 18, 27L and 36

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

SE-3. 02 OCT 2025 to 30 OCT 2025