

ORLANDO, FLORIDA

AL-917 (FAA)

25219

WAAS CH 63209 W27A	APP CRS 275°	Rwy Ldg 11002 TDZE 45 Apt Elev 55
--	------------------------	--

RNAV (GPS) RWY 27R
ORLANDO SANFORD INTL (SFB)

ORLANDO SANFORD INTL (SFB)

T


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM, increase LNAV Cat C/D visibility to 1 SM.

MALSR




MISSED APPROACH:
Climb to 2000 direct
UGMAH and hold.


ATIS 125.975	ORLANDO APP CON 135.3 351.9 (N) 119.775 351.9 (S)	SANFORD TOWER★ 120.3(CTAF) 0 254.35	GND CON 121.35 254.35	CLNC DEL 123.975	CLNC DEL 121.35 (When twr closed)
-----------------	---	--	--------------------------	---------------------	---

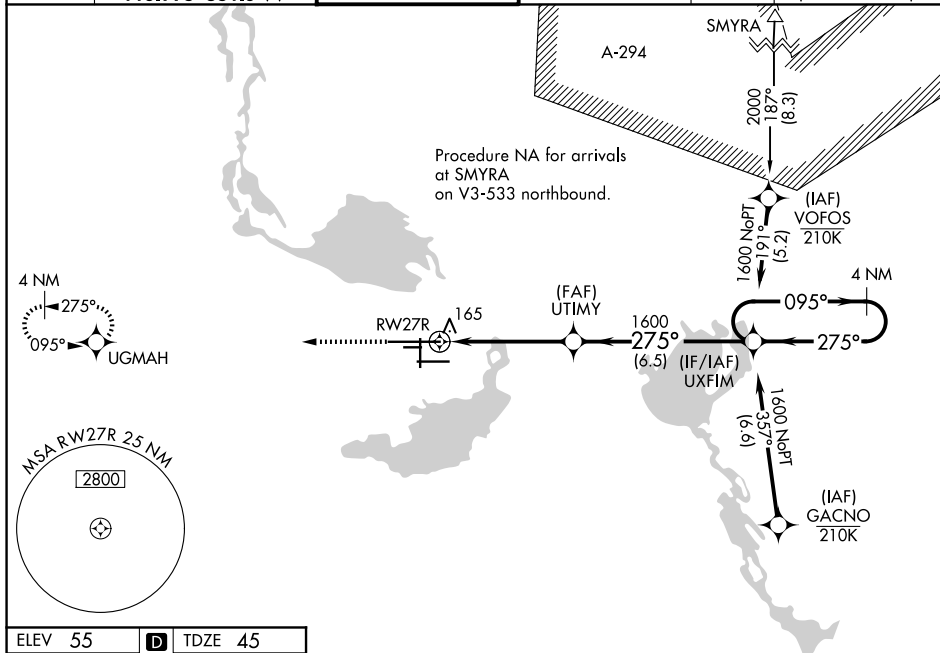

ELEV 55	D	TDZE 45
---------	----------	---------



MIRL Rwy 9C-27C and 18-36 **L**
HIRL Rwy 9L-27R and 9R-27L **L**
REIL Rwy 9C, 18, 27L and 36

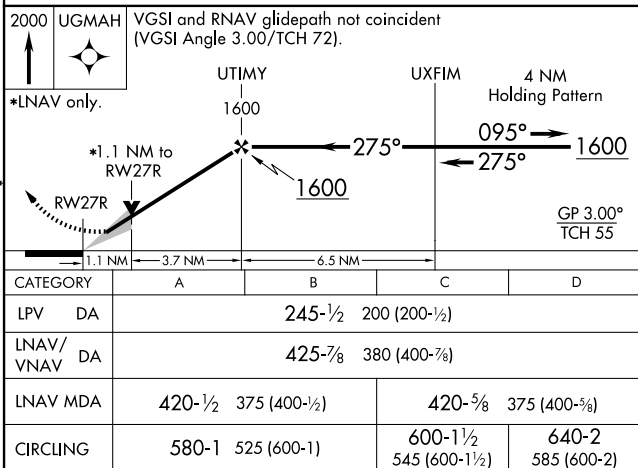

ORLANDO, FLORIDA

Amdt 4 12OCT17

28°47'N-81°14'W

ORLANDO SANFORD INTL (SFB)

RNAV (GPS) RWY 27R

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025