

RNAV (GPS) RWY 9L
ORLANDO SANFORD INTL (SFB)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Orlando Exec altimeter setting. When local altimeter setting not received, use Orlando Exec altimeter setting and increase LPV DA to 282, LNAV/VNAV DA to 501 and all MDA 60 feet; increase LNAV/VNAV all Cats visibilities ½ SM and LNAV Cat C/D visibility ¼ SM. Night landings: Rwy 27C NA.



MISSED APPROACH: Climb to 1600 direct UXFIM and hold.

MISSED APCH FIX

4 NM

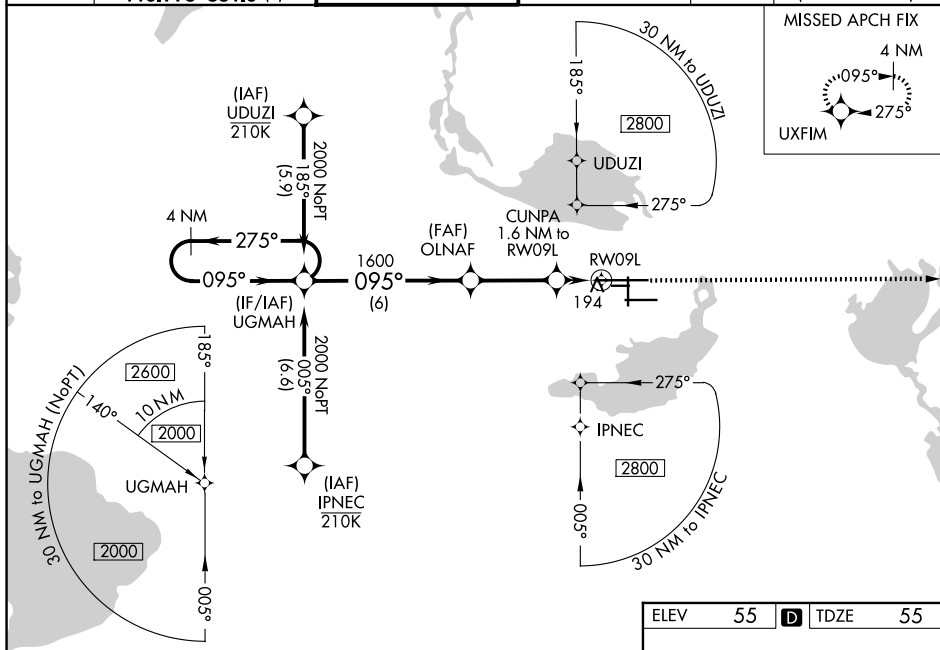

SE-3, 02 OCT 2025 to 30 OCT 2025

CATEGORY	A	B	C	D
LPV DA	255-½		200 (200-½)	
LNAV/VNAV DA	355-½		300 (300-½)	
LNAV MDA	460-½ 405 (500-½)		460-¾ 405 (500-¾)	
CIRCLING	580-1 525 (600-1)		600-1½ 545 (600-1½) 640-2 585 (600-2)	

MIRA Rwy 9C-27C and 18-36
HIRL Rwy 9L-27R and 9R-27L
REIL Rws 9C, 18, 27L and 36