

WAAS CH 78123 W26A	APP CRS 257°	Rwy Idg TDZE 384 Apt Elev 403
--	------------------------	---

RNAV (GPS) RWY 26


LANCASTER (LNS)

⚠

Night landing: Rwy 13, 31 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase all DA 64 feet, all MDA 80 feet, increase LPV and LNAV/VNAV visibility all Cats and LNAV and Circling Cat C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Harrisburg Intl altimeter setting.

MISSED APPROACH:
Climb to 3000 direct FANRU and on track 331° to BAARN and hold.

ATIS 125.675	HARRISBURG APP CON 126.45 281.525	LANCASTER TOWER ★ 120.9 (CTAF) 0 251.1	GND CON 121.8	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

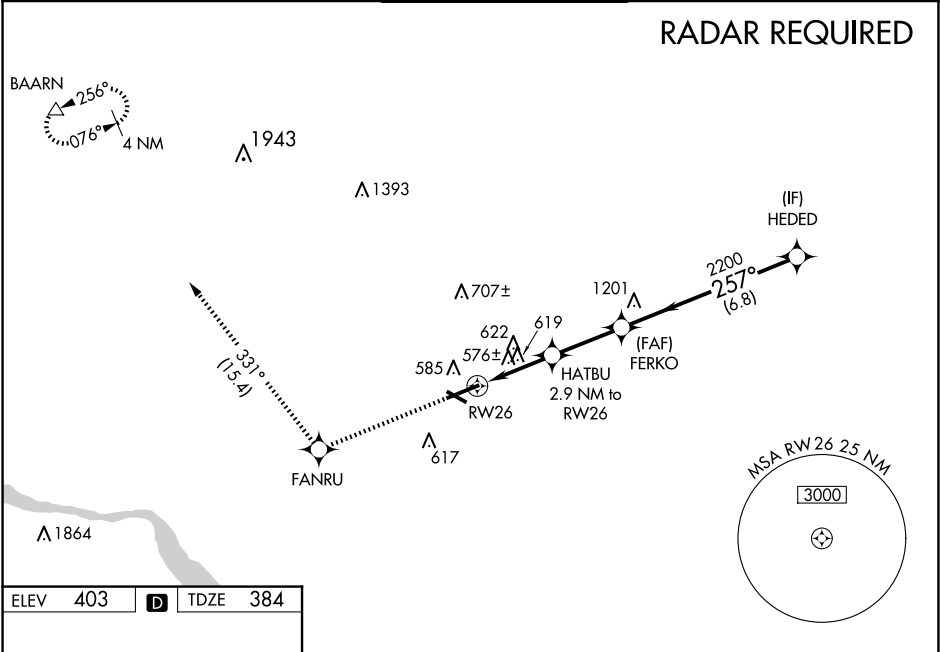

ELEV 403 D TDZE 384

REIL Rwy 31 1
HIRL Rwy 8-26 1
MIRL Rwy 13-31 1

3000	FANRU	tr 331°	BAARN	HEDED
*LNAV only	HATBU 2.9 NM to RW26	2200	2200	3000
RW26	1.9	1	2.7 NM	6.8 NM
CATEGORY	A	B	C	D
LPV DA	634-3/4 250 (300-3/4)			
LNAV/VNAV DA	905-1 3/4 521 (500-1 3/4)			
LNAV MDA	1020-1	636 (700-1)	1020-1 7/8	636 (700-1 7/8)
CIRCLING	1020-1	617 (700-1)	1020-1 7/8 617 (700-1 7/8)	1060-2 657 (700-2)