



WAAS CH 63122 W35A	APP CRS 346°	Rwy Ldg TDZE Apt Elev	6932 311 321
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

EASTERWOOD FLD (CLL)

RNP APCH - GPS.	MALSRL 	MISSED APPROACH: Climb to 2100 direct ZAKBU and hold.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LPV Cat E visibility to ¾ SM, increase LNAV/VNAV all Cats visibility to ¾ SM, increase LNAV Cat E visibility to 1¾ SM.		

ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

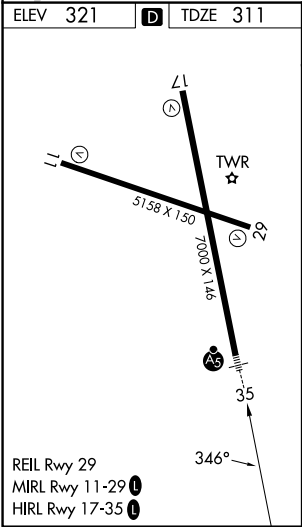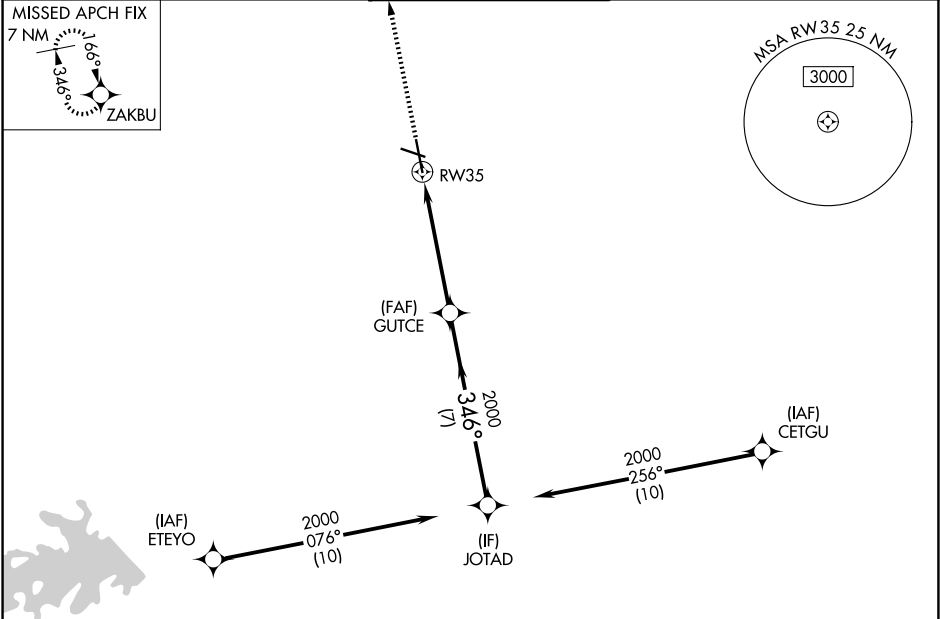

2100	ZAKBU					
		GUTCE 2000	JOTAD			
		1.3 NM to RW35	2000			GP 3.00° TCH 55
		1.3 NM	3.9 NM	7 NM		
CATEGORY	A	B	C	D	E	
LPV DA	511-½ 200 (200-½)					
LNAV/VNAV DA	619-½ 308 (300-½)					
LNAV MDA	760-½ 449 (500-½)	760-¾ 449 (500-¾)				
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)	