

LOC I-MMU	APP CRS	Rwy ldg	5998
110.3	229°	TDZE	184
		Apt Elev	187

ILS or LOC RWY 23

MORRISTOWN MUNI (MMU)

RNAV 1-GPS or RADAR required for procedure entry.
From EMRSN: RNAV 1-GPS required.

MALSR


MISSED APPROACH: Climb to 2000 on heading 229° and on SBJ VOR/DME R-070 to SBJ VOR/DME and hold.

▼

▲

Circling to Rwy 13, 31 NA at night. Autopilot coupled approach NA below 732. For inop ALS, increase S-LOC 23 Cats C/D visibility to 1 3/4 SM.

ATIS	NEWARK APP CON	MORRISTOWN TOWER ★	GND CON	CLNC DEL
124.25	127.6 379.9	118.10 (CTAF) 353.9	134.2	128.6

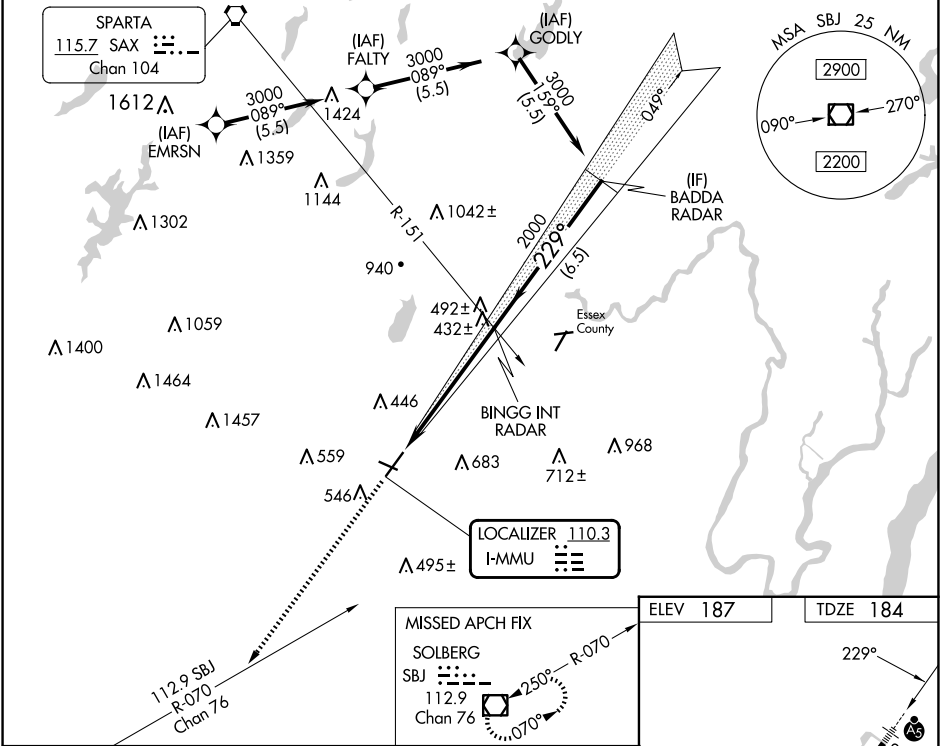

2000

↑

hdg 229°

SBJ

SBJ R-070

BINGG INT RADAR

2000

BADDA RADAR

3000

2000

229°

GS 3.00°

TCH 55

5.5 NM

6.5 NM

CATEGORY	A	B	C	D
S-ILS 23		384-1/2	200 (200-1/2)	
S-LOC 23	700-1/2	516 (600-1/2)	700-1	516 (600-1)
CIRCLING	860-1 673 (700-1)	900-1 713 (800-1)	1000-2 1/2 813 (900-2 1/2)	1200-3 1013 (1100-3)

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

REIL Rwy 5 and 31

HIRL Rwy 5-23

MIRL Rwy 13-31