

RNAV (GPS) RWY 5R

WAAS CH 69870 W05B	APCH CRS 052°	Rwy Idg 12,001 TDZE 19 Arpt Elev 22
--	-------------------------	--

- (USN)

OCEANA NAS (APOLLO SOUCEK FLD) (KNTU)

RNP APCH-GPS

T * When ALS inop increase vis to 3/4 mile.


** When ALS inop increase vis to 7/8 mile.

ALSF-1

MISSED APPROACH: Climb to 3000 direct JAGNI and hold. Continue climb in hold to 3000.

ATIS 317.6	APP CON/DEP CON 123.9 266.8	TOWER 127.075 360.2	GND CON 119.6 336.4	CLNC DEL 254.4	ASR/PAR
---------------	--------------------------------	------------------------	------------------------	-------------------	---------


*** When ALS inop, increase CAT AB vis to 1 mile; CAT CD vis to 1 1/8 miles.



NORFOLK
NS

NORFOLK
INTL

For uncompensated
Baro-VNAV systems,
LNAV/VNAV NA below -15°C
(5°F) or above 54°C (130°F).

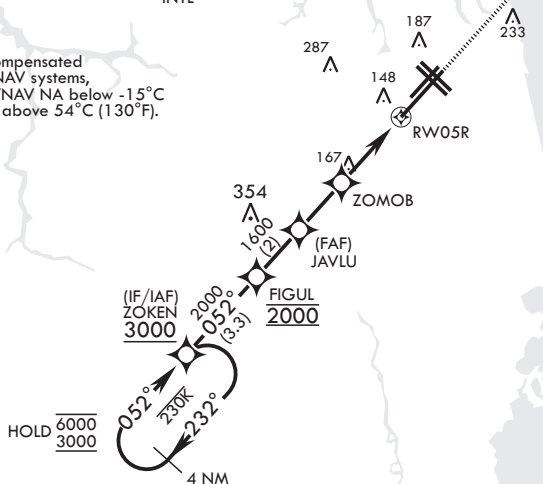

MSA RW05R 25 NM

2300

EMERG SAFE ALT 100 NM 6100

4 NM
Holding Pattern ZOKEN


6000 $\leftarrow 232^\circ$

GP 3.00°
TCH 55


3000	JAGNI
------	-------

ELEV 22

TDZE 19

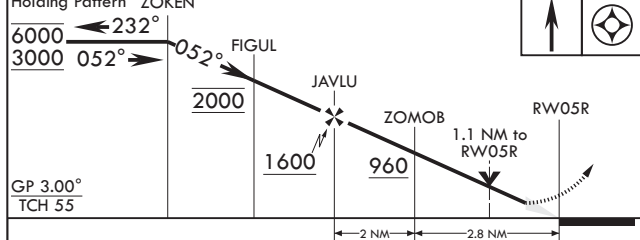

CATEGORY	A		B		C		D	
LPV DA*	219-½		200		(200-½)			
LNAV/VNAV DA**	333-½		314		(400-½)			
LNAV MDA***	420-½	401	(400-½)		420-¾	401	(400-¾)	
CIRCLING	500-1	478	(500-1)		600-1½ 578 (600-1½)	600-2 578 (600-2)		



HIRL all rwys
Wave-Off Lights all rwys

VIRGINIA BEACH, VIRGINIA

36°49'N - 76°02'W OCEANA NAS (APOLLO SOUCEK FLD) (KNTU)

Amdt 5 12JUN25

RNAV (GPS) RWY 5R

NE-3, 02 OCT 2025 to 30 OCT 2025