

WAAS CH 70410 W22A	APP CRS 216°	Rwy Ldg 10000 TDZE 1166 Apt Elev 1189
--	------------------------	--

RNAV (GPS) Y RWY 22
GRANT COUNTY INTL (MWH)


RNP APCH.

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. Baro-VNAV and VDP NA when using Ephrata altimeter setting. When local altimeter setting not received, use Ephrata altimeter setting; increase all DA 36 feet and all MDA 40 feet, increase LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility $\frac{1}{2}$ SM and Circling Cat D visibility $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 4000 direct
ONPIC and hold.

ATIS 119.05	GRANT COUNTY APP CON ★ 126.4 379.95	GRANT COUNTY TOWER ★ 118.25 (CTAF) 0 257.8 (E) 128.0 257.8 (W)	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------


Procedure NA for arrivals at EPH VORTAC
on airway radials 060 CW 135.

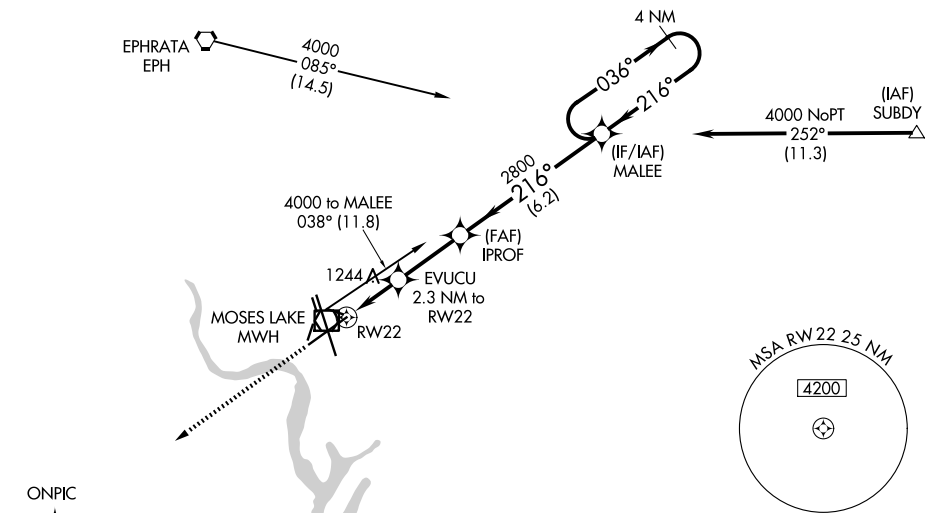

NW-1, 02 OCT 2025 to 30 OCT 2025

Diagram illustrating the 4 NM Holding Pattern for RW22. The pattern is defined by the following parameters:

- Altitudes:** 4000, ONPIC, EVUCU 2.3 NM to RW22, IPROF 2800, MALEE, 1920*, 2800.
- Distances:** 0.9 NM (from RW22 to start of pattern), 2.7 NM (from start of pattern to MALEE), 6.2 NM (from MALEE to end of pattern).
- Angles:** 036°, 216°.
- Pattern Type:** 4 NM Holding Pattern.
- GP 3.00° TCH 50**

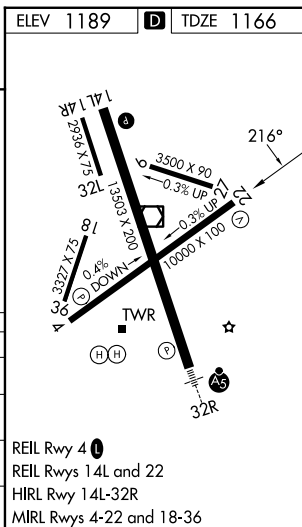

RNAV (GPS) Y RWY 22