

WAAS
CH **48912**
W32A

APP CRS
319°

Rwy Ldg
TDZE **53**
Apt Elev **53**

RNAV (GPS) RWY 32

SALISBURY-OCEAN CITY WICOMICO RGNL (SBY)

RNP APCH

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. When local altimeter setting not received use Georgetown altimeter setting: increase LPV DA to 305 feet; increase LNAV/VNAV DA to 510; increase all MDA 60 feet and LNAV Cat C and Circling Cat D visibility ¼ SM. For inoperative MALSRL, increase LNAV Cat D visibility to 1¼ SM. VDP and Baro-VNAV NA when using Georgetown altimeter setting.

MALSRL

AS

CLIMB TO 2100 DIRECT HYDRS AND HOLD.

ASOS
118.325

PATUXENT APP CON★
127.95 314.0


SALISBURY TOWER★
119.425 (CTAF) 0

GND CON
123.775

CLNC DEL
123.775

CLNC DEL
132.45
(When twr closed)

UNICOM
122.95

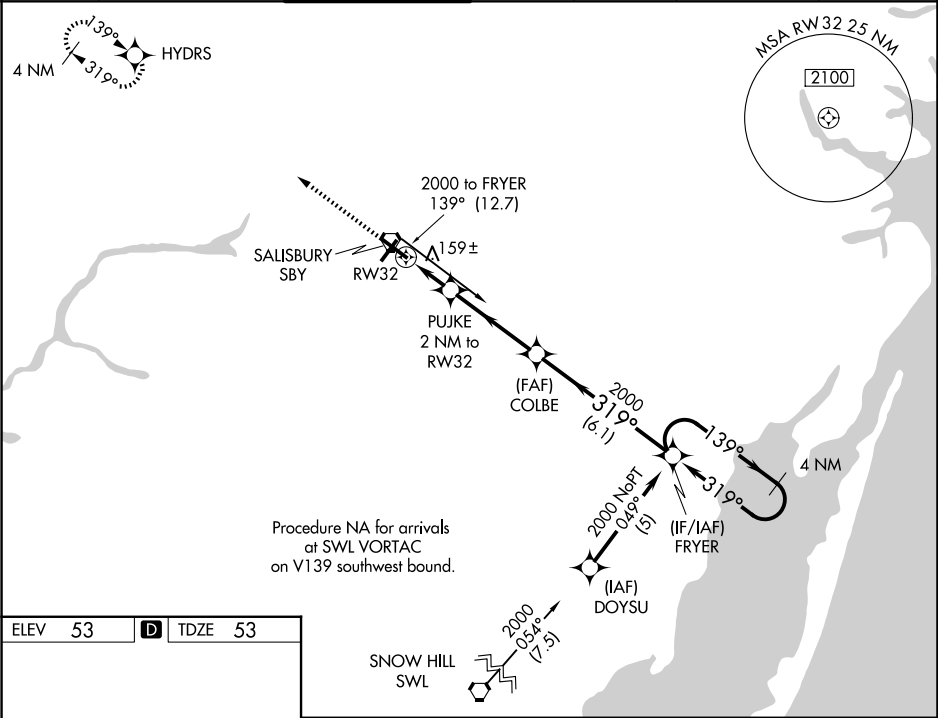

ELEV 53

D

TDZE 53

TWR

REIL Rwy 5, 14 and 23

MIRL Rwy 5-23

HIRL Rwy 14-32

2100

HYDRS

*LNAV only

COLBE

FRYER

4 NM Holding Pattern

PUJKE 2 NM to RW32

RW32

1 NM

1 NM

3.9 NM

6.1 NM

GP 3.00°

TCH 54

CATEGORY	A	B	C	D
LPV DA		253-½	200 (200-½)	
LNAV/VNAV DA		458-1	405 (500-1)	
LNAV MDA		420-½	367 (400-½)	420-1 367 (400-1)
CIRCLING	480-1 427 (500-1)	520-1 467 (500-1)	560-1½ 507 (600-1½)	700-2 647 (700-2)