

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.

▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. For then local altimeter setting not received, use Winder altimeter setting: increase LPV DA to 1071 feet, increase LNAV/VNAV DA to 1011 feet, increase all MDA 60 feet and increase LNAV Cat C/D visibility to 1 mile and Circling Cat D visibility to 2 1/4 mile. For inop MALSF, increase LNAV/VNAV all Cats visibility to 1/2 mile, increase LNAV Cat C/D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cats visibility to 1/2 mile, increase LNAV/VNAV all Cats visibility to 1 mile, increase LNAV Cat C, D visibility to 1 1/2 mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.

MALSF

MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS
132.875


ATLANTA APP CON ★
132.475 291.1

ATHENS TOWER ★
126.3 (CTAF) **L** 338.275

GND CON
121.8


UNICOM
122.95

MISSED APCH FIX

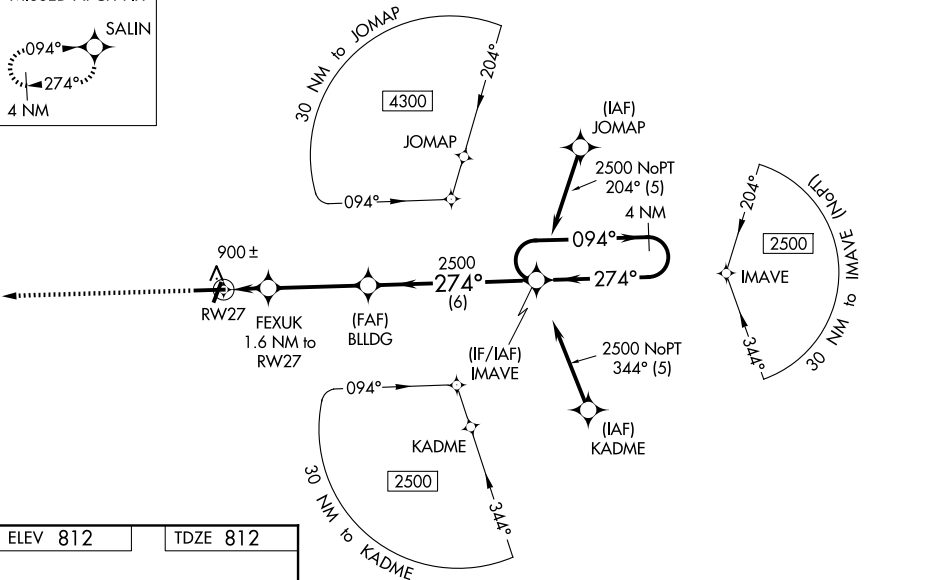

ELEV 812

TDZE 812



2500 SALIN

*LNAV only

RW27

*1 NM to RW27

FEXUK 1.6 NM to RW27

*1.36

2500

274°

094°

274°

2500

GP 3.00°

TCH 40

4 NM Holding Pattern

CATEGORY	A	B	C	D
LPV DA	1012- ³ / ₄		200 (200- ³ / ₄)	
LNAV/VNAV DA	1064- ³ / ₄		252 (300- ³ / ₄)	
LNAV MDA	1160- ³ / ₄		348 (400- ³ / ₄)	
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

ATHENS, GEORGIA
Amdt 1B 07OCT21

33°57'N-83°20'W

ATHENS/BEN EPPS (AHN)
RNAV (GPS) RWY 27