




LOM IC	APP CRS	Rwy Ldg	7302
332	016°	TDZE	1321
		Apt Elev	1333

NDB RWY 1R

WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼ ▲	For inop ALS, increase S-1R Cat A/B visibility to RVR 5500, Cat C/D visibility to 1¼.	MALSR AS	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct PICHE LOM and hold, continue climb in hold to 3000.
---------------------------	---	--------------------------------	--

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125,15	126,7 353,5	118,2 257,8	121,9 348,6

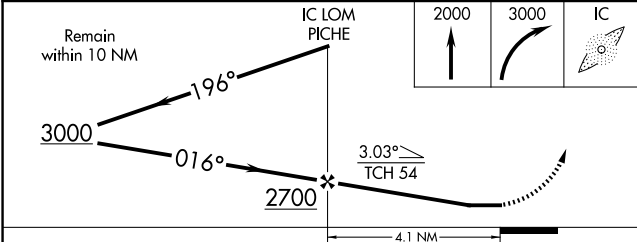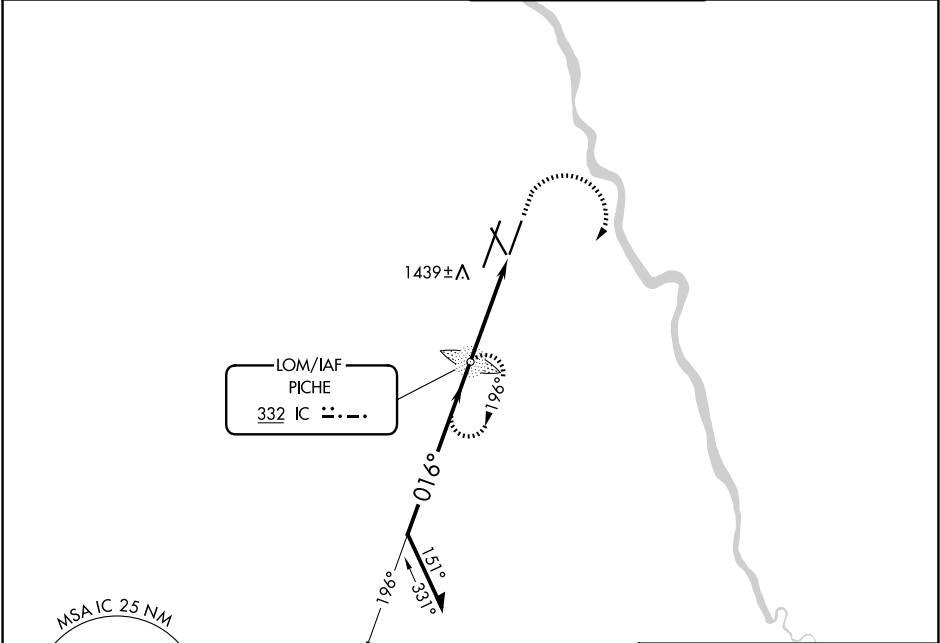

CATEGORY	A	B	C	D
S-1R	1760/40 439 (500-¾)			
CIRCLING	1800-1 467 (500-1)	1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	

