
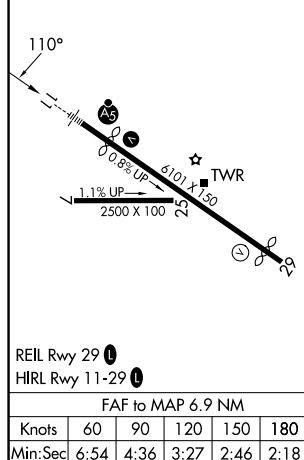


LOC I-SBP <u>109.7</u>	APP CRS 110°	Rwy Ldg TDZE Apt Elev	5300 198 212
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 11
SAN LUIS OBISPO COUNTY RGNL (SBP)

	Circling Rwy 25 NA at night. Circling NA north of Rwy 11-29. Autopilot coupled approach NA below 677'. For inop ALS, increase S-ILS 11 Cat C visibility to ¾ SM, S-LOC 11 Cat A visibility to 1¼ SM, Cat B visibility to 1½ SM.		MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3300 on heading 215° and MQO VORTAC R-126 to MQO VORTAC and hold, continue climb-in-hold to 3300. S-ILS 11* missed approach requires minimum climb of 210 feet per NM to 1160.	
	ATIS 120.6	SANTA BARBARA APP CON ★ 127.725 244.575	SAN LUIS TOWER ★ 124.0 (CTAF) 0 379.9	GND CON 121.6	UNICOM 122.95

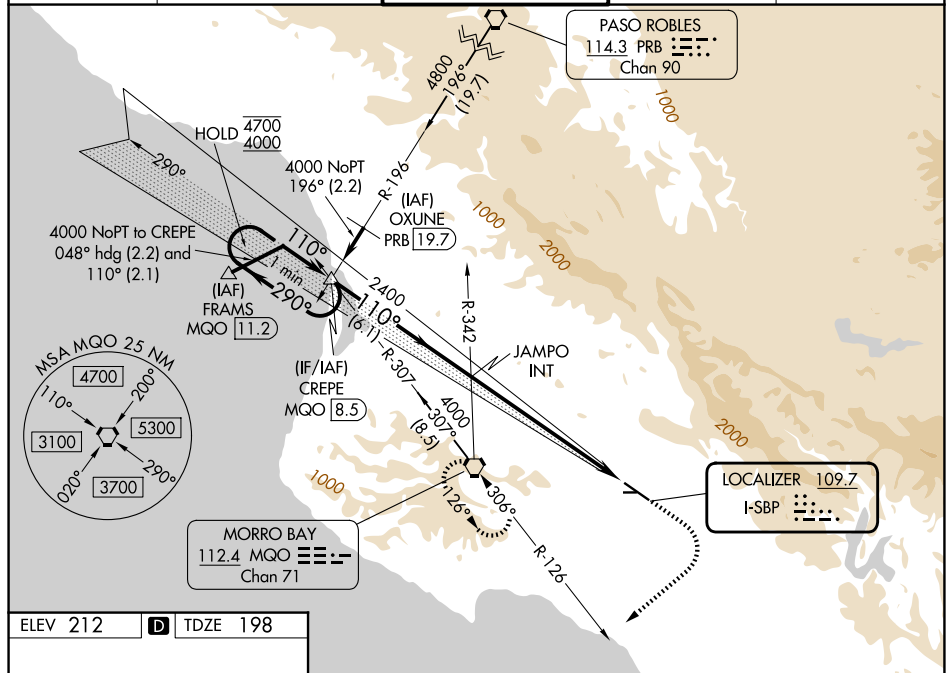

One Minute Holding Pattern

CREPE MGO 8.5

4700 ← 290°

4000 → 110°

GS 3.00°

TCH 49

JAMMO INT

2400

2400

6.1 NM

6.9 NM

1000 ↑

3300 hdg 215°

MGO R-126

MGO

CATEGORY	A	B	C	D
S-ILS 11*	398-½ 200 (200-½)			
S-ILS 11	495-½ 297 (300-½)			
S-LOC 11	1420-¾ 1222 (1300-¾)	1420-1 1222 (1300-1)	1420-3	1222 (1300-3)
CIRCLING	1420-1¼ 1208 (1300-1¼)	1420-1½ 1208 (1300-1½)	1500-3 1288 (1300-3)	1760-3 1548 (1600-3)