

WAAS CH 45612 W15A	APP CRS 146°	Rwy Ldg TDZE Apt Elev	10179 75 100
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15
COLD BAY (CDB) (PACD)


RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cats B/C/D southwest of Rwy 15-33. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cat C/D visibility to RVR 6000.
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4100 direct PABGE and on track 134° to AFVEK and hold, continue climb-in-hold to 4100.

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

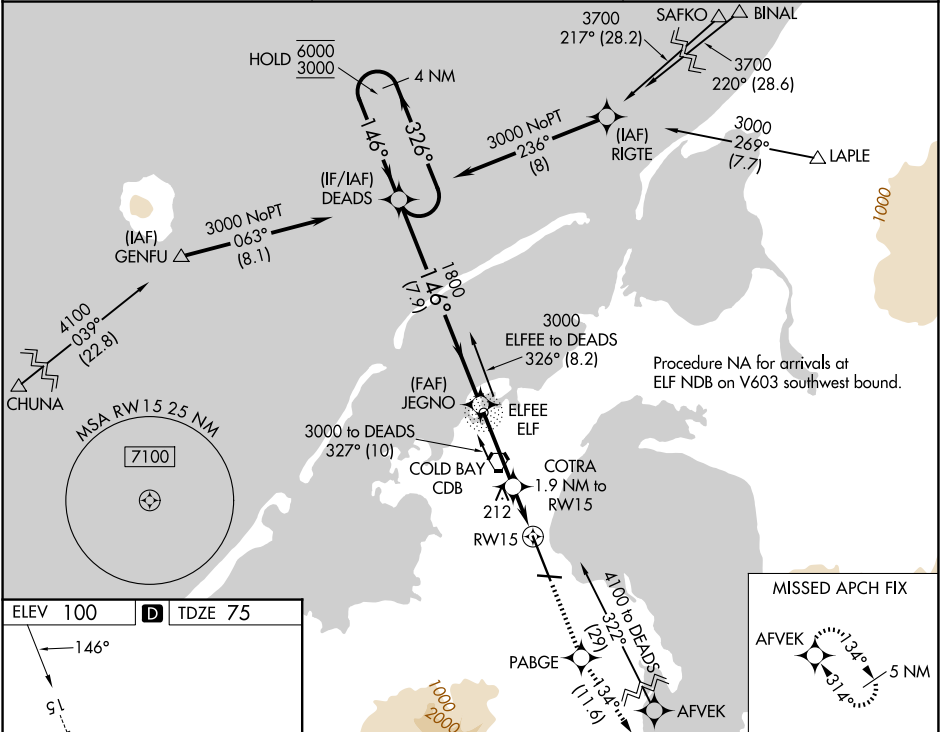

ELEV 100 **D** TDZE 75

HIRL all Rwys 0

4 NM Holding Pattern		DEADS	JEGNO	4100 ↑	PABGE ✦	tr 134° ✦	AFVEK ✦	
6000 ← 326° 3000 → 146°		146° 1800		COTRA 1.9 NM to *1.1 NM RW15 to RW15				
GP 3.10° TCH 55		1800		*760				
		7.9 NM		3.2 NM		0.8 NM		
				1.1 NM		RW15		
						*LNAV only		
CATEGORY	A	B	C	D				
LPV DA#	275/24		200 (200-½)					
LNAV/VNAV DA	325/24		250 (300-½)					
LNAV MDA	480/24		405 (400-½)		480/40		405 (400-¾)	
CIRCLING	540-1 440 (500-1)		560-1 460 (500-1)		560-1½ 460 (500-1½)		860-2½ 760 (800-2½)	