



|           |         |          |
|-----------|---------|----------|
| LOC I-BER | APP CRS | Rwy Ldg  |
| 108.9     | 234°    | 6790     |
|           |         | TDZE     |
|           |         | 18       |
|           |         | Apt Elev |
|           |         | 20       |

ILS Z or LOC Z RWY 23  
ADAK (ADK) (PADK)

|                                                                                                                                                                                                                       |      |                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ADF and DME required.                                                                                                                                                                                                 | MALS | MISSED APPROACH: Climb to 5400 direct ADK NDB/DME and on the 241° bearing from ADK NDB/DME to COMAT/ADK 10 DME and left turn direct ADK NDB/DME and hold. Missed approach requires minimum climb of 409 feet per NM to 2700; if unable to meet climb gradient, see ILS Y or LOC Y RWY 23. |
| ⚠ Circling NA at night. Circling NA northwest of Rwy 5-23. Rwy 23 helicopter visibility reduction below ¾ SM NA. DME from ADK NDB. Simultaneous reception of I-BER and ADK DME required. Cat E for USAF/USN use only. | ⚠    |                                                                                                                                                                                                                                                                                           |

|                  |                                 |               |
|------------------|---------------------------------|---------------|
| AWOS-3P<br>134.5 | ANCHORAGE CENTER<br>126.4 254.3 | CTAF<br>122.9 |
|------------------|---------------------------------|---------------|

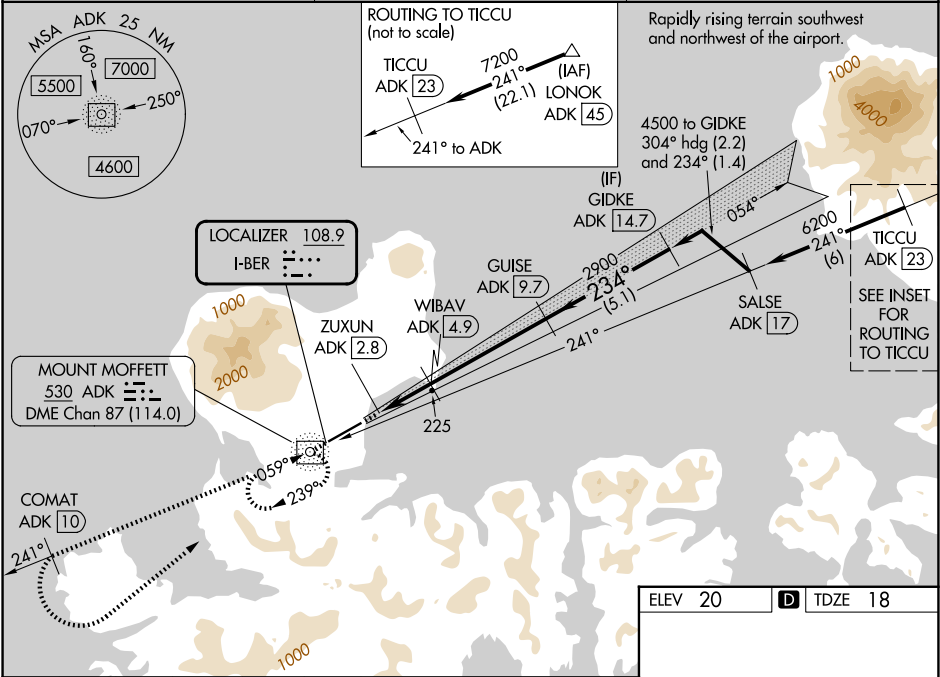
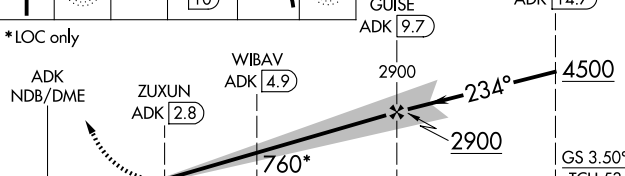
|                                                                                    |                                                                                     |                  |                                                |                                                                                     |                         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------|------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------|
| 5400                                                                               | ADK                                                                                 | ADK              | COMAT                                          | ADK                                                                                 |                         |
| ↑                                                                                  |  | ADK 241°         | ADK 10                                         |  |                         |
| *LOC only                                                                          |                                                                                     |                  |                                                |                                                                                     |                         |
| ADK NDB/DME                                                                        | ZUXUN<br>ADK 2.8                                                                    | WIBAV<br>ADK 4.9 | 2900<br>GUSE<br>ADK 9.7                        | 4500<br>GIDKE<br>ADK 14.7                                                           |                         |
|  |                                                                                     |                  |                                                |                                                                                     |                         |
| 0.8 2.1 NM 4.7 NM 5.1 NM                                                           |                                                                                     |                  |                                                |                                                                                     |                         |
| CATEGORY                                                                           | A                                                                                   | B                | C                                              | D                                                                                   | E                       |
| S-ILS 23                                                                           | 309/50 291 (300-1)                                                                  |                  |                                                |                                                                                     |                         |
| S-LOC 23                                                                           | 480/55 462 (500-1)                                                                  |                  | 480-1 $\frac{3}{8}$ 462 (500-1 $\frac{3}{8}$ ) |                                                                                     |                         |
| CIRCLING                                                                           | 720-1 700 (700-1)                                                                   |                  | 1060-3<br>1040 (1100-3)                        | 2400-3<br>2380 (2400-3)                                                             | 2440-3<br>2420 (2500-3) |

