

APP CRS
063°

Rwy Ldg
11014

TDZE
256

Apt Elev
305


RNAV (GPS) Y RWY 6L
GUAM INTL (GUM)(PGUM)

RNP APCH - GPS.
Circling NA southeast of Rwy 6R-24L.
For inop ALS, increase Cat C and D visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct WABOX and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
----------------------	----------------------------------	-----------------------------------	-------------------------------

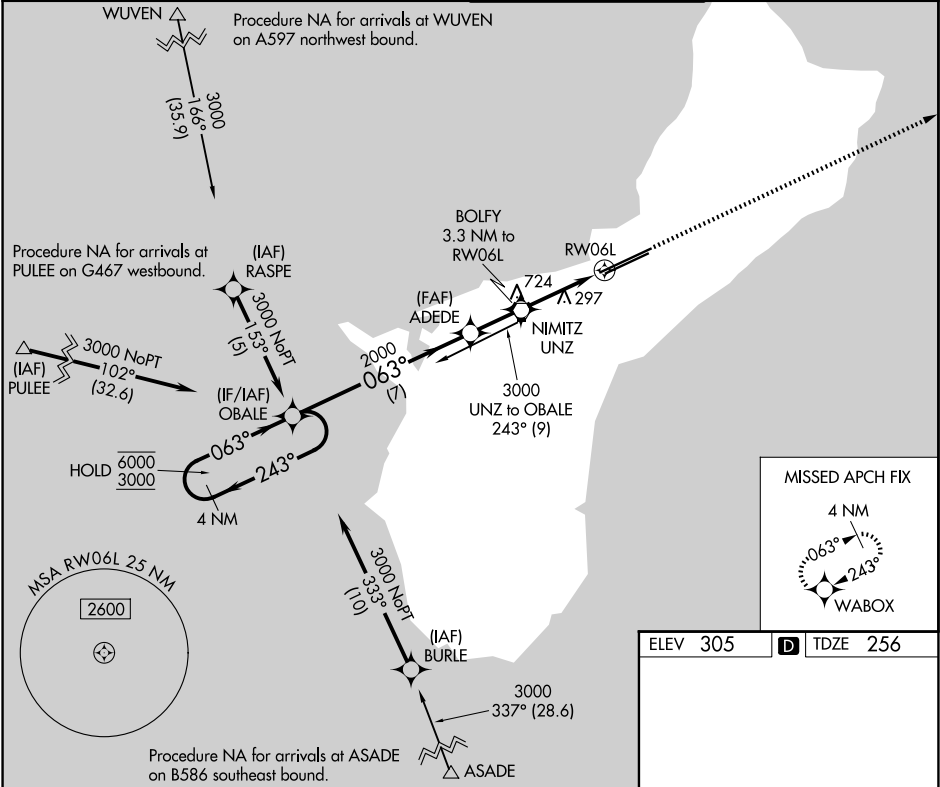

4 NM Holding Pattern
6000 ← 243°
3000 → 063°

OBACLE
ADEDE
BOLFY 3.3 NM to RW06L
1.3 NM to RW06L
RW06L
1480
7 NM
2 NM
2 NM
1.3 NM

3000 WABOX
↑
063°

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 73).
3.35° TCH 68
0.5% UP → 0.7% DOWN
12014 X 150
0.8% UP → 0.6% DOWN
TWR
063°

CATEGORY	A	B	C	D
LNNAV MDA	720-1 464 (500-1)	720-1 464 (500-1)	720-1 464 (500-1)	720-1 464 (500-1)
CIRCLING	880-1 575 (600-1)	880-1 575 (600-1)	940-1 635 (700-1 3⁄4)	NA

HIRL all Rwys