

RNAV (GPS) RWY 11

|           |         |
|-----------|---------|
| APCH CRS  | Rwy Idg |
| 105°      | 8000    |
| TDZE      | 318     |
| Arpt Elev | 322     |

[USN]


GOLIAD NOLF (KNGT)

RNP APCH

MISSED APPROACH: Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

When local altimeter setting not received, use Beeville Muni altimeter setting.

|                 |                         |
|-----------------|-------------------------|
| ASOS<br>353.675 | CTAF<br>132.875 307.075 |
|-----------------|-------------------------|

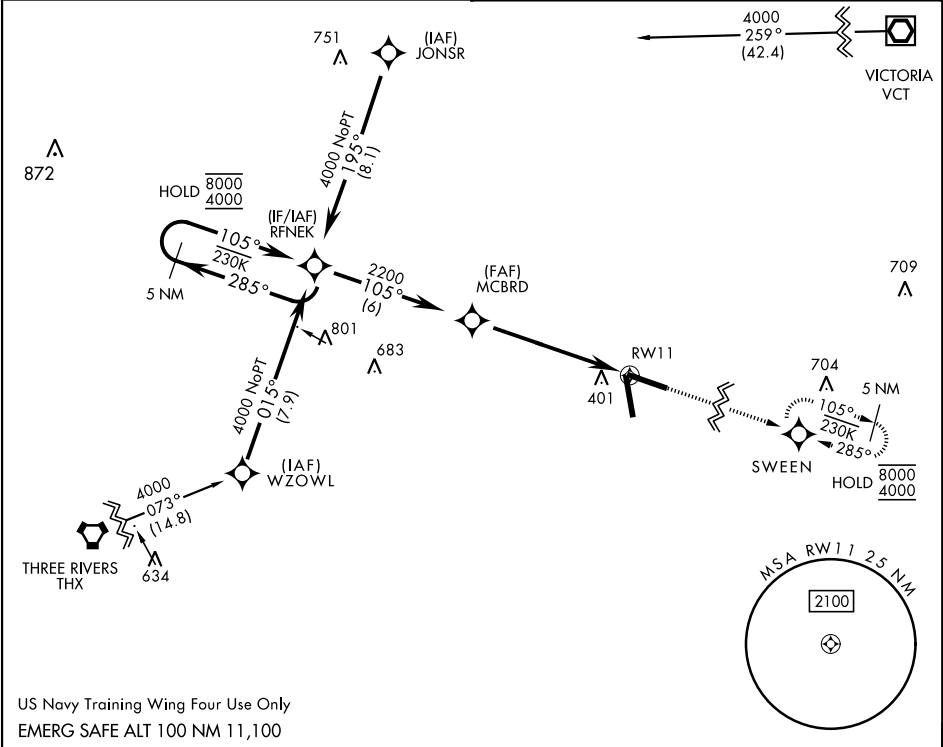

US Navy Training Wing Four Use Only  
EMERG SAFE ALT 100 NM 11,100

5 NM Holding Pattern

RFNEK

8000  
4000

285°

105°

MCBRD

2200

105°

3.00°

TCH 54

5.7 NM

1.1 NM to RWY 11

RWY 11

4000

SWEEN

|                                        |                   |                   |                   |                   |
|----------------------------------------|-------------------|-------------------|-------------------|-------------------|
| CATEGORY                               | A                 | B                 | C                 | D                 |
| RNAV MDA                               | 720-1 402 (400-1) | 720-1 402 (400-1) | 720-1 402 (400-1) | 720-1 402 (400-1) |
| CIRCLING                               | 800-1 478 (500-1) | 820-1 498 (500-1) | 820-1 498 (500-1) | 880-2 558 (600-2) |
| BEEVILLE MUNI ALTIMETER SETTING MINIMA |                   |                   |                   |                   |
| RNAV MDA                               | 760-1 442 (500-1) | 760-1 442 (500-1) | 760-1 442 (500-1) | 760-1 442 (500-1) |
| CIRCLING                               | 800-1 478 (500-1) | 820-1 498 (500-1) | 820-1 498 (500-1) | 880-2 558 (600-2) |

ELEV 322

TDZE 318

105°

0.7% DOWN

8000 x 1.50

20

35

8000 x 1.50

0.3% UP

HIRL Rwy 11-29, 17-35  
TDZL Rwy 11-29, 17-35

RNAV (GPS) RWY 11

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025