

RNAV (GPS) RWY 17


APCH CRS	Rwy Idg	8001
166°	TDZE	322
	Arpt Elev	322

[USN]

GOLIAD NOLF (KNGT)

RNP APCH	MISSED APPROACH: Climb to 900 then climbing left turn to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.
When local altimeter setting not received, use Beeville Muni altimeter setting.	

ASOS 353.675	CTAF 132.875 307.075
-----------------	-------------------------

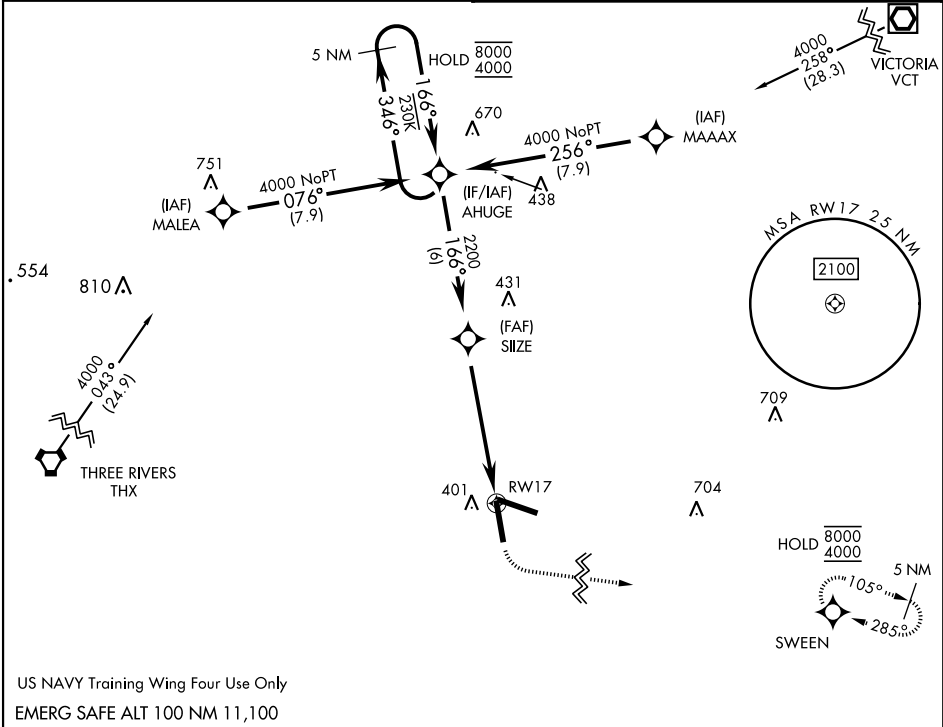

US NAVY Training Wing Four Use Only
EMERG SAFE ALT 100 NM 11,100

5 NM Holding Pattern	AHUGE	VDP NA with Beeville Muni altimeter setting.	900	4000	SWEEN	ELEV 322	TDZE 322
8000 4000	346° 166°	SIIZE 2200	0.8 NM to RW17	0.35 NM to RW17	0.7% UP	8000 x 150	20
CATEGORY	A	B	C	D			
LNAV MDA		640-1 318 (400-1)					
CIRCLING	760-1 438 (500-1)	780-1 458 (500-1)	780-1½ 458 (500-1½)	880-2 558 (600-2)			
BEEVILLE MUNI ALTIMETER SETTING MINIMA							
LNAV MDA		680-1 358 (400-1)					
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)			

RNAV (GPS) RWY 17

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025