


RNAV (GPS) RWY 29

APCH CRS	Rwy Idg
285°	8000
TDZE	285
Arprt Elev	322

[USN]

GOLIAD NOLF (KNGT)

RNP APCH	MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.
When local altimeter setting not received, use Beeville Muni altimeter setting.	
ASOS 353.675	CTAF 132.875 307.075

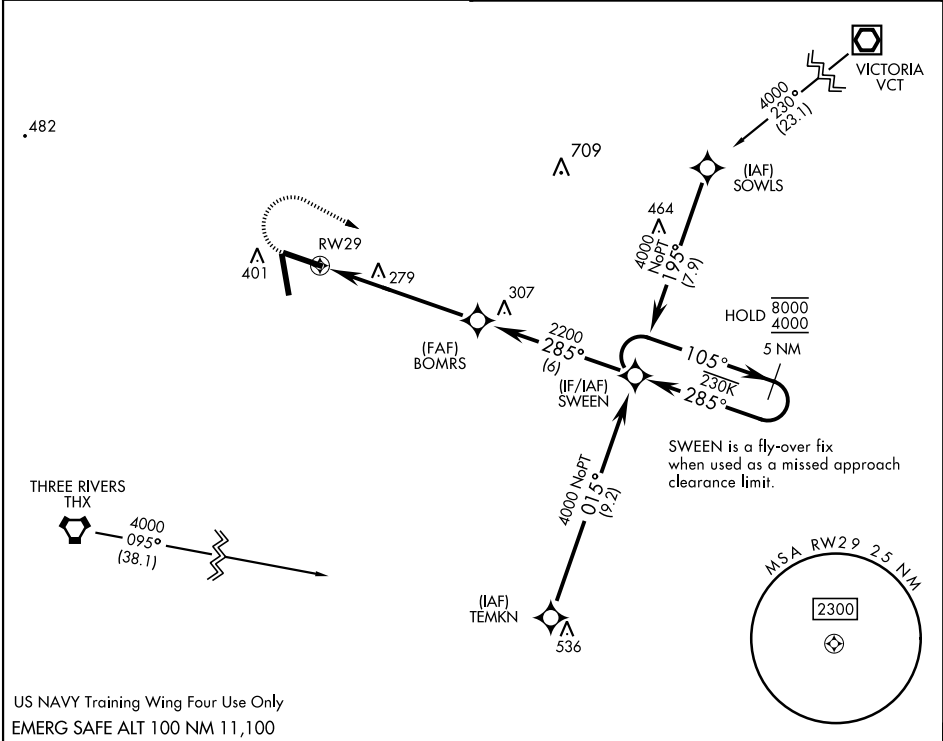

US NAVY Training Wing Four Use Only
EMERG SAFE ALT 100 NM 11,100

900	4000	SWEEN	VDP NA with Beeville Muni altimeter setting.	SWEEN 5 NM Holding Pattern	ELEV 322	TDZE 285
0.8 NM to RWY 29 RWY 29 3.00° TCH 53 5.9 NM BOMRS 2200 285° 105° 285° 8000 4000						
CATEGORY	A	B	C	D		
LNAV MDA	580-1 295 (300-1)					
CIRCLING	760-1 438 (500-1)	780-1 458 (500-1)	780-1½ 458 (500-1½)	880-2 558 (600-2)		
BEEVILLE MUNI ALTIMETER SETTING MINIMA						
LNAV MDA	640-1 355 (400-1)					
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)		
					HIRL Rwy 11-29, 17-35 TDZL Rwy 11, 29, 17, 35	

RNAV (GPS) RWY 29

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025