


GND CON	SHL-3188 [USAF]	Rwy	Knots	60	120	180	240	300	360
127.25 335.5		14	ⓐ V/V(fpm)	300	600	900	1200	1500	1800
SILVERBOW TOWER ★		32	ⓑ V/V(fpm)	265	530	795	1060	1325	1590
124.75 257.95									
NELLIS CONTROL									
119.35 254.4									
		Minimum Climb Rate							
		ⓐ to 10,700							
		ⓑ to 5900							

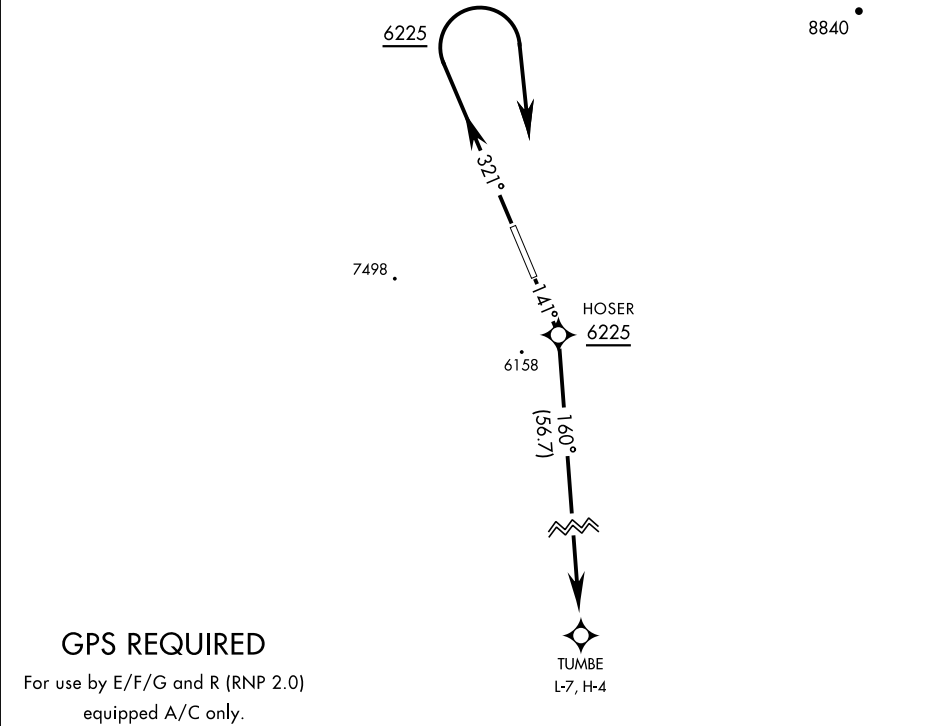

▼	DEPARTURE ROUTE DESCRIPTION
TAKE-OFF RWY 14: Fly heading 141°, at 6225 (HOSER) turn right direct TUMBE.	
TAKE-OFF RWY 32: Fly heading 321°, at 6225 turn right direct TUMBE.	