

WAAS
CH **56401**
W14A

APP CRS
139°

Rwy Ldg
TDZE **933**
Apt Elev **937**

RNAV (GPS) RWY 14


DELAWARE COUNTY RGNL (MIE)

RNP APCH.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase LPV DA all Cats to 1375 and visibility 3⁄8 SM, LNAV/VNAV DA all Cats to 1410 and visibility 1⁄8 SM; increase all MDA 140 feet and LNAV Cat C 1⁄2 SM and Cat D 1⁄4 SM, Circling visibility Cat C/D 1⁄2 SM.

MISSED APPROACH:
Climb to 2900 direct
CITUK and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

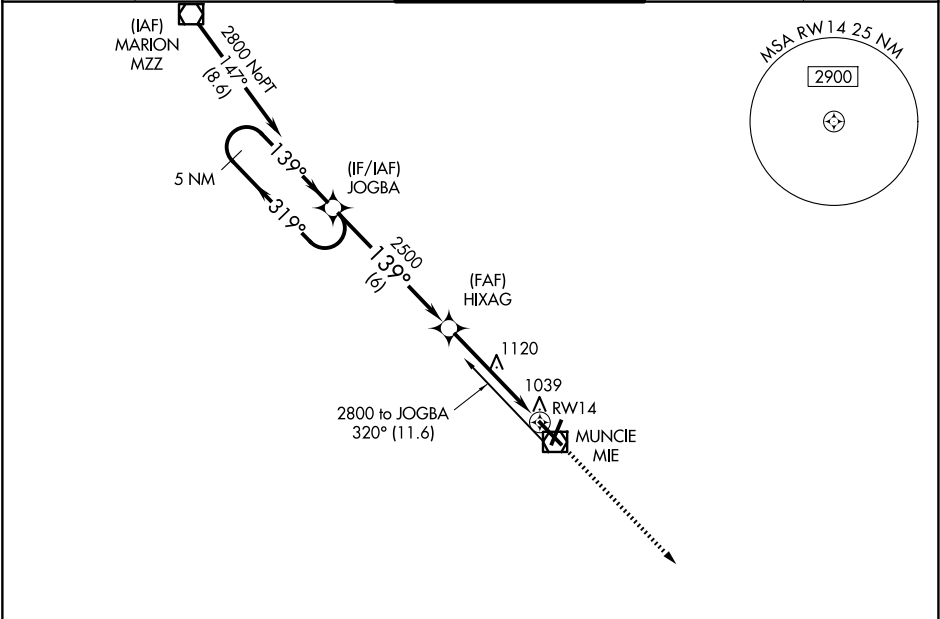

ELEV 937	D	TDZE 933
----------	----------	----------

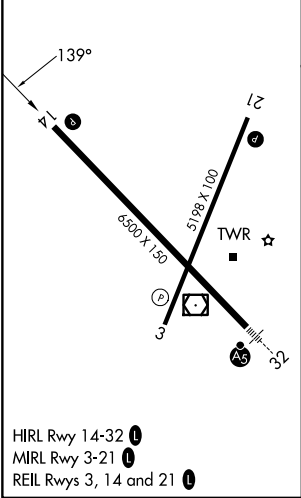

HIRL Rwy 14-32 **0**
MIRL Rwy 3-21 **0**
REIL Rwy 3, 14 and 21 **0**

5 NM Holding Pattern		JOGBA	HIXAG	RW14	CITUK
2800		319°	139°	2500	2900
GP 3.00°		TCH 50		*1.5 NM to RW14	*LNAV only
		6 NM	3.2 NM	1.5	
CATEGORY	A	B	C	D	
LPV DA	1254-1		321 (400-1)		
LNAV/VNAV DA	1289-1¼		356 (400-1¼)		
LNAV MDA	1420-1	487 (500-1)	1420-1¼ 487 (500-1¼)	1420-1½ 487 (500-1½)	
CIRCLING	1460-1¼	523 (600-1¼)	1480-1½ 543 (600-1½)	1560-2 623 (700-2)	

EC-2, 02 OCT 2025 to 30 OCT 2025

EC-2, 02 OCT 2025 to 30 OCT 2025