

APP CRS	Rwy Ldg	8200
047°	TDZE	32
	Apt Elev	32

RNAV (GPS) RWY 5

PAGO PAGO INTL (PPG) (NSTU)

RNP APCH.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 22°C or above 54°C. When local altimeter setting not received, procedure NA. Circling NA northwest of Rwy 5-23. Rwy 5 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LNAV Cats A/B. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM and LNAV Cats C/D visibility to 2 SM.

MALSR

MISSED APPROACH:
(Maintain 185 K max until 760) Climb to 760 then climbing right turn to 4000 direct DRAWN and hold.

FALEOLO APP CON 118.1 6.553 (HF)	CTAF 122.9	118.30
-------------------------------------	---------------	--------

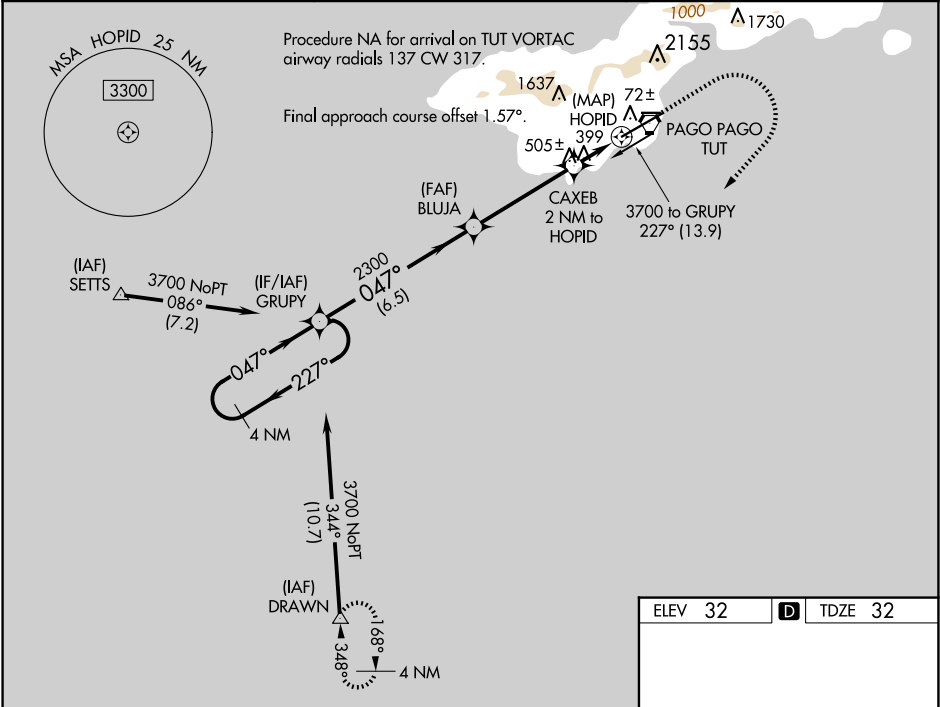

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 57).

760 4000 DRAWN

GRUPY

3700

227°

047°

BLUJA

2300

047°

2300

*840

CAXEB 2 NM to HOPID

HOPID

*LNAV only

GP 3.25° TCH 51

6.5 NM

4.2 NM

2 NM

0.2

CATEGORY

A

B

C

D

LNAV/VNAV DA

551-1

519 (600-1)

LNAV MDA

760-1

728 (800-1)

760-1½

728 (800-1½)

CIRCLING

760-1

728 (800-1)

820-2¼

860-2¾

788 (800-2¼)

828 (900-2¾)

HIRL Rwys 5-23 and 8-26

PAC, 02 OCT 2025 to 27 NOV 2025

PAC, 02 OCT 2025 to 27 NOV 2025