


LOC/DME I-OYC 109.5 Chan 32	APP CRS 355°	Rwy Ldg 6080 TDZE 40 Apt Elev 46	ILS or LOC RWY 36 CORPUS CHRISTI INTL (CRP)
---	------------------------	---	--

DME required.
▼ For inop ALS, increase S-ILS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to RVR 4500.

MALSR
AS

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 on heading 338° and CRP VORTAC R-287 to ATHIS INT/CRP 23.3 DME and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

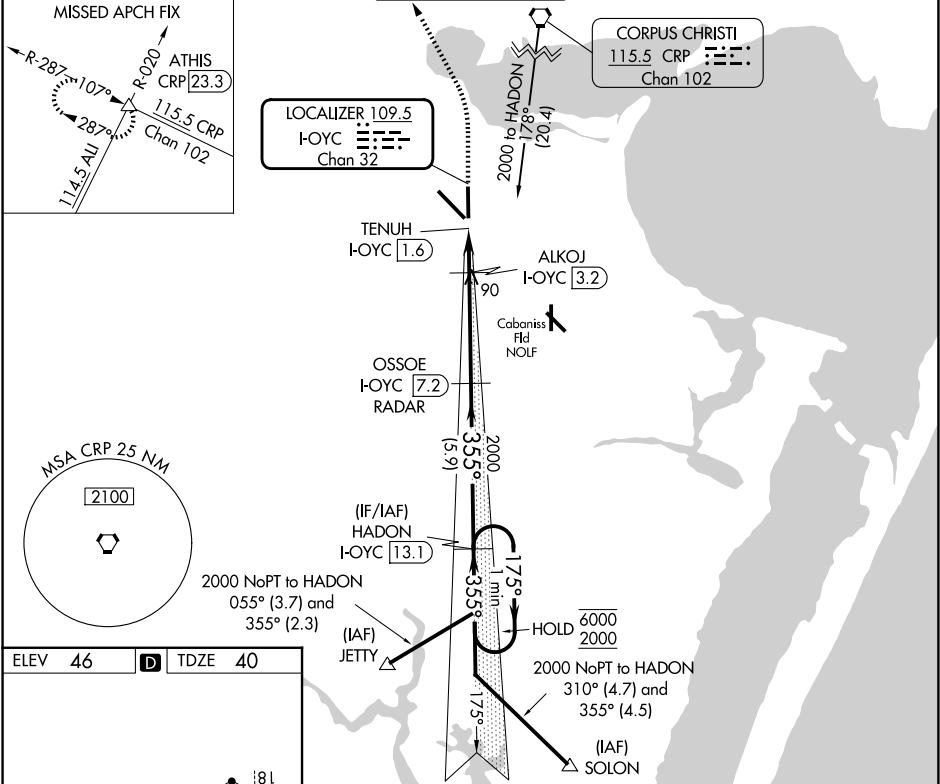

ELEV 46 TDZE 40

HIRL Rwy 13-31 and 18-36

7510 X 150

6080 X 150

TWR

355°

700

2000

hdg 338°

CRP R-287

ATHIS

ILS unusable inside DA. LOC unusable within 1.6 DME.

OSSOE I-OYC 7.2 RADAR

HADON I-OYC 13.1

One Minute Holding Pattern

ALKOJ I-OYC 3.2

TENUH I-OYC 1.6

2000

355°

175°

6000

2000

GS 3.00° TCH 53

0.4

1.6 NM

4 NM

5.9 NM

CATEGORY	A	B	C	D	E
S-ILS 36	240/24 200 (200-1/2)				
S-LOC 36	340/24 300 (300-1/2)				
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2 1/4 774 (800-2 1/4)	820-2 1/2 774 (800-2 1/2)	820-2 3/4 774 (800-2 3/4)