

WAAS CH 53635 W18A	APP CRS 175°	Rwy Ldg 6080 TDZE 42 Apt Elev 46
--	------------------------	---

RNAV (GPS) RWY 18
CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.




T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to $\frac{3}{4}$ SM, all LNAV/VNAV visibilities to $\frac{7}{8}$ SM, and LNAV Cat C, D, and E visibility to $1\frac{3}{4}$ SM.

MALSR



MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

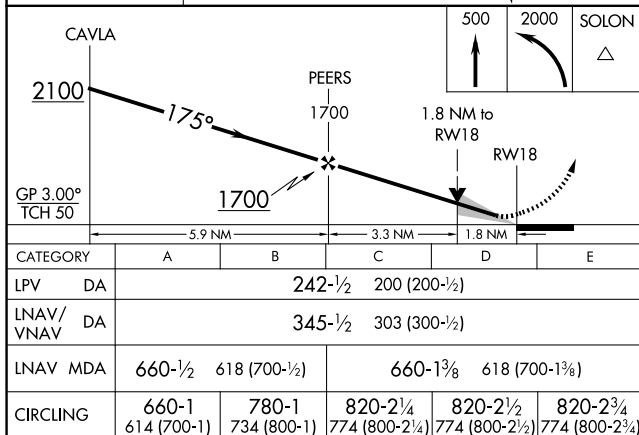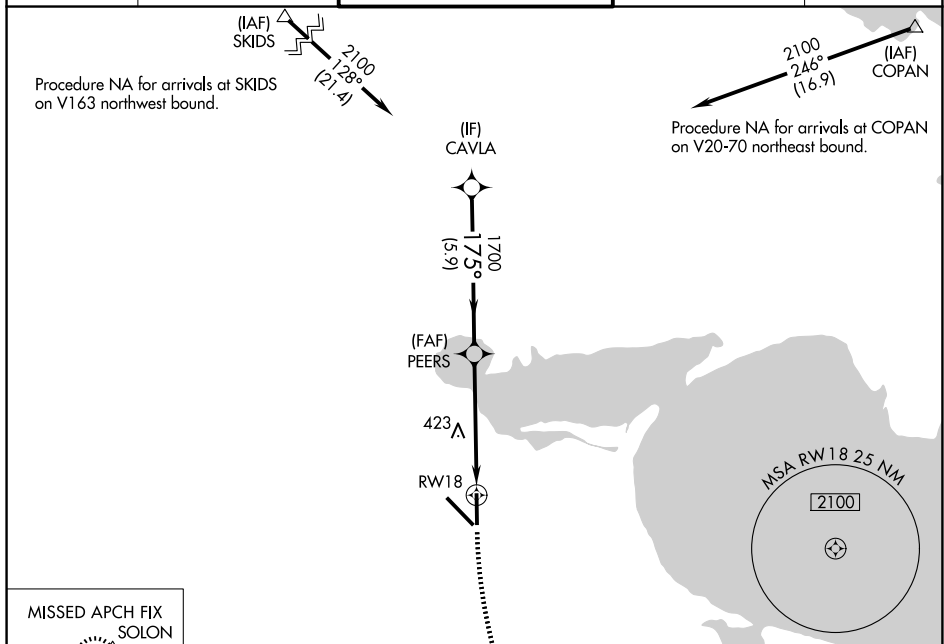

CATEGORY		A	B	C	D	E
LPV	DA	242-½		200 (200-½)		
LNAV/ VNAV	DA	345-½		303 (300-½)		
LNAV	MDA	660-½	618 (700-½)	660-1⅓ 618 (700-1⅓)		
CIRCLING		660-1 614 (700-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)

