

WAAS CH 99341 W21A	APP CRS 214°	Rwy Idg 7000 TDZE 7003 Apt Elev 7014
--	------------------------	---

RNAV (GPS) RWY 21



FLAGSTAFF PULLIAM (FLG)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA.
A For inop ALS, increase LPV alt Cats visibility to $\frac{7}{8}$ SM.



MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.

ATIS 125.8	PHOENIX APP CON 126.375 236.775	FLAGSTAFF TOWER ★ 134.55 (CTAF) 0 239.25	GND CON 121.9	UNICOM 122.95
---------------	------------------------------------	---	------------------	------------------

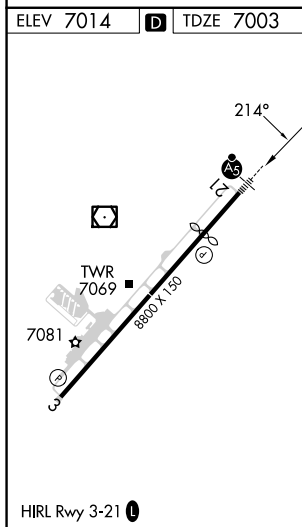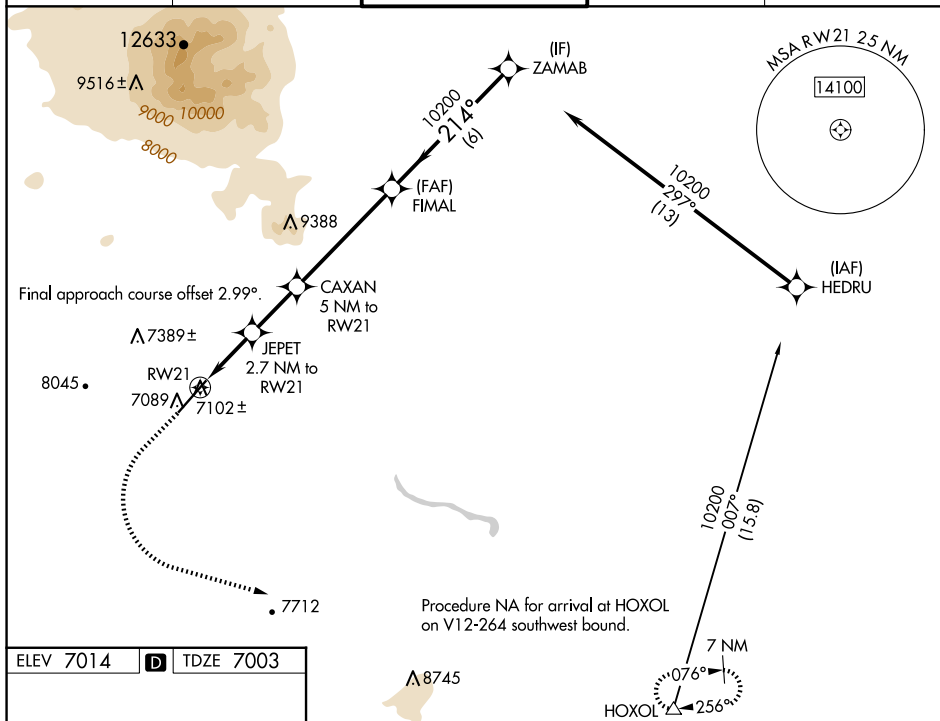

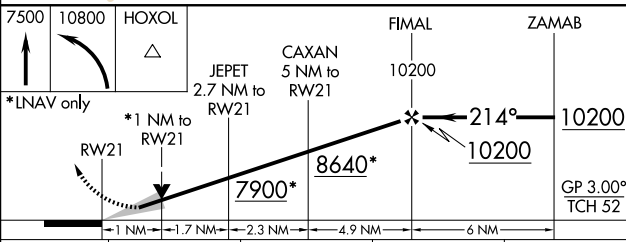7500 ↑	10800 ↖	HOXOL △					
*LNAV only			JEPET 2.7 NM to RW21 CAXAN 5 NM to RW21 FINAL 10200 ZAMAB 10200 GP 3.00° TCH 52				
CATEGORY			A		B	C	D
LPV	DA	7258-½		255 (300-½)			
LNAV/ VNAV	DA	7319-⅝		316 (400-⅝)			
LNAV	MDA	7360-½ 357 (400-½)		7360-⅝ 357 (400-⅝)			
CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)		8100-3 1086 (1100-3)		8560-3 1546 (1600-3)	