

WAAS CH 99413 W18A	APP CRS 179°	Rwy Ldg 6143 TDZE 8 Apt Elev 9
--	------------------------	---

RNAV (GPS) RWY 18



HOUMA-TERREBONNE (HUM)

Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 285, increase LNAV/VNAV DA to 526 and all visibilities ½ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM. For inop ALS when using Louis Armstrong New Orleans Intl altimeter setting increase all LPV visibilities to ¾ SM, increase all LNAV/VNAV visibilities and LNAV Cats C and D visibility to 1 ¾ SM.

MALSR

MISSED APPROACH:
Climb to 1900 direct
ITWIE and hold.

ATIS 120.25	NEW ORLEANS APP CON 118.9 350.35	HOUMA TOWER ★ 125.3 (CTAF) 346.3	GND CON 123.875	CLNC DEL 118.9 (When twr closed)	UNICOM 122.95
-----------------------	--	---	---------------------------	---	-------------------------

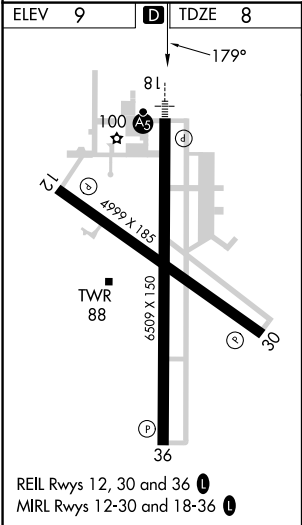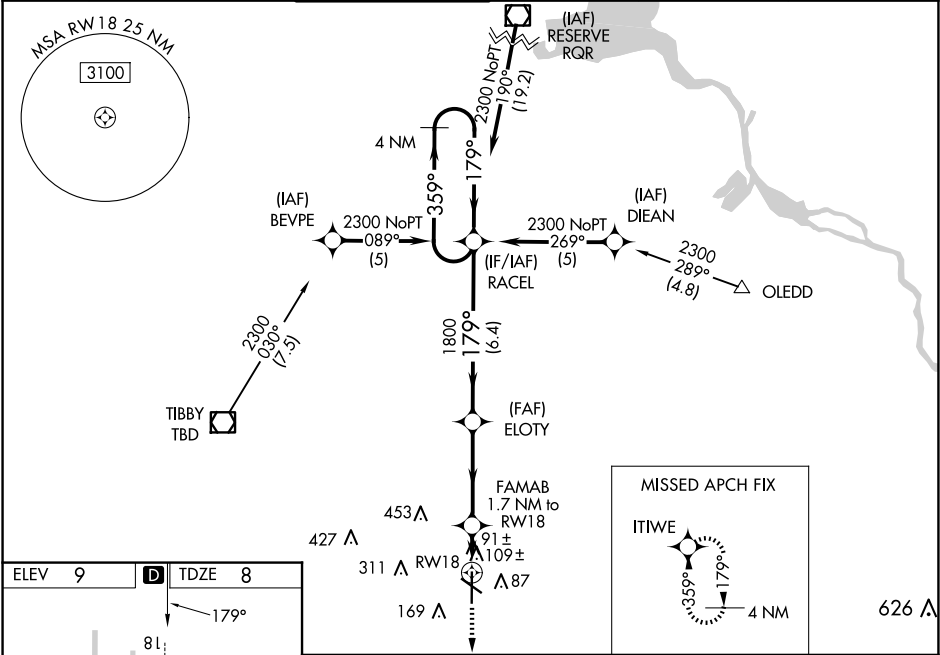

1900	ITWIE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).		4 NM	Holding Pattern
*LNAV only.		FAMAB 1.7 NM to RW18	ELOTY	179°	359°
		600*	1800	2300	GP 3.00° TCH 52
		1.7 NM	3.7 NM	6.4 NM	
CATEGORY	A	B	C	D	
LPV DA	208-½		200 (200-½)		
LNAV/VNAV DA	449-¾		441 (500-¾)		
LNAV MDA	440-½	432 (500-½)	440-¾	432 (500-¾)	
CIRCLING	480-1	471 (500-1)	760-2¼ 751 (800-2¼)	760-2½ 751 (800-2½)	