

WAAS CH 77704 W23A	APP CRS 230°	Rwy ldg 11498 TDZE 87 Apt Elev 93
--	------------------------	--


RNAV (GPS) RWY 23

KINSTON RGNL JETPORT AT STALLINGS FLD (ISO)

▼ Baro-VNAV NA when using Seymour Johnson AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **▲** VDP NA with Seymour Johnson AFB altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Seymour Johnson AFB altimeter setting and increase LPV DA to 432, LNAV/VNAV DA to 413, and all MDA 60 feet. Increase LPV all Cats and LNAV Cats C and D visibility ½ mile, and increase LNAV/VNAV all Cats and Circling Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 2100 direct
UHIRO and hold.

AWOS-3 132.75	SEYMOUR JOHNSON APP CON ★ 127.3 273.6	KINSTON TOWER ★ 120.6 (CTAF) 0 335.55	GND CON 121.9	UNICOM 122.95
-------------------------	---	---	-------------------------	-------------------------

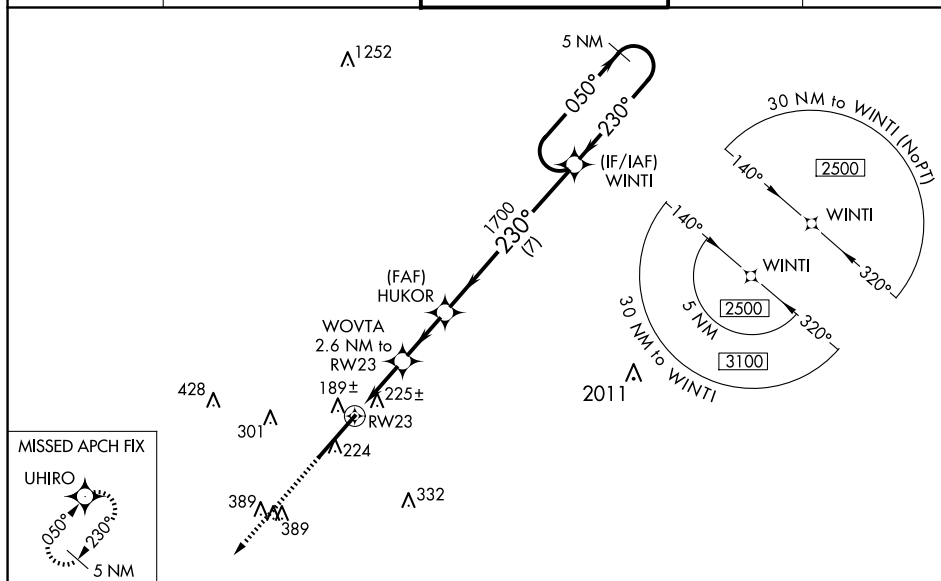

ELEV 93 TDZE 87

230° to RW23

113.1 MHz

TWR 173

REIL Rwy 23

HIRL Rwy 5-23

2100 UHIRO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 74).

5 NM Holding Pattern

*LNAV only.

WOVTA 2.6 NM to RW23

HUKOR 1700

WINTI

050° → 2500

← 230°

GP 3.00° TCH 50

1.2 NM to RW23

1.2 NM 1.6 2.3 7 NM

CATEGORY	A	B	C	D
LPV DA	390-1	303 (300-1)		
LNAV/VNAV DA	437-1½	350 (400-1½)		
LNAV MDA	540-1	453 (500-1)	540-1¾	453 (500-1¾)
CIRCLING	580-1	487 (500-1)	700-1¾ 607 (700-1¾)	740-2 647 (700-2)