


LOC I-PTK	APP CRS	Rwy Ldg	6520
111.1	275°	TDZE	974
		Apt Elev	981

LOC BC RWY 27L
OAKLAND COUNTY INTL (PTK)

	Circling Rwy 9L, 36 NA at night. When local altimeter setting not received, use DET altimeter setting and increase all MDAs 120 feet, increase S-LOC BC 27L visibility Cats C and D ¾ SM, and Circling visibility Cats C and D ½ SM.	MISSED APPROACH: Climbing left turn to 3000 direct SVM VORTAC and hold.
-----------------------------------	--	--

ATIS 125.025	DETROIT APP CON 132.35 284.0	PONTIAC TOWER ★ 120.5 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------	---------------------------------	-----------------------------------	------------------	------------------

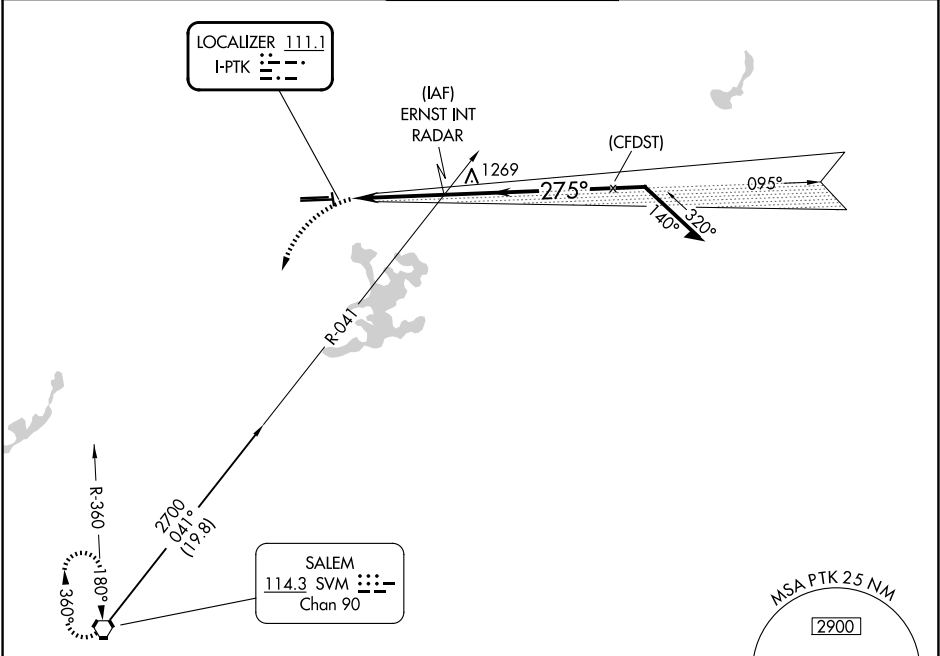

ELEV 981 D TDZE 974

HIRL Rwy 9R-27L L

MIRL Rwy 9L-27R

REIL Rwy 27L 0

REIL Rwys 9L and 27R

FAF to MAP 3.3 NM

Knots	60	90	120	150	180
Min:Sec	3:18	2:12	1:39	1:19	1:06

BACK COURSE

3000 SVM

Disregard GS indications.

ERNST INT RADAR

Remain within 10 NM

095°

2500

275°

2300

≤ 3.00°

TCH 42

0.8

3.3 NM

CATEGORY	A	B	C	D
S-LOC 27L	1 440-1	466 (500-1)	1 440-1¾	466 (500-1¾)
CIRCLING	1 500-1	1 540-1	1 640-1¾	1 640-2
	519 (600-1)	559 (600-1)	659 (700-1¾)	659 (700-2)

EC-1, 02 OCT 2025 to 30 OCT 2025

EC-1, 02 OCT 2025 to 30 OCT 2025